

ATLAS ACCESSORY EQUIPMENT for excavators – PRICE PROPOSAL**ACCESSORY EQUIPMENT**

PRODUCT RANGE



MOBILE EXCAVATORS

ATLAS mobile excavators are the all-purpose excavators for road construction and underground engineering work. They are enormously strong, solid and mobile and can be operated effectively in virtually all kinds of conditions.

- Excellent stability for maximum performance
- Optimal centre of gravity and ideal weight distribution
- Precise digger control with a sensitive hydraulic system
- Streamlined for trench work, strong design and construction



RAIL-ROAD EXCAVATORS

The ATLAS Rail-Road Excavators are adaptable and flexible: the new computer-aided CARSY system ensures optimal contact pressure with the rails. They can be used for an array of applications, from cutting works to dismantling and upgrading the railway track.

- More than 30 years manufacturing experience
- Optimal stability - Allows easy railing / de-railing and convenient handling for operators
- Versatility
- Mechanical Expertise
- Security
 - Automatic self-diagnosis
 - Emergency de-railing is permanently available and double protected on rail guide wheels
 - Fast cycle times
 - Optimised handling

MOBILBAGGER

Die ATLAS Mobilbagger sind die Universalbagger beim Straßen- und Tiefbau. Ihre enorme Kraft, Standfestigkeit und Mobilität ermöglichen ein effektives Arbeiten unter nahezu allen Einsatzbedingungen.

- Maximale Leistung dank exzellenter Stabilität
- Optimaler Schwerpunkt und ideale Gewichtsverteilung
- Präzise Baggersteuerung über feinfühlige Hydraulik
- Optimierte Design für Grabarbeiten, robuste Konstruktion, Bedienerfreundlichkeit

ZWEIWEGBAGGER

Die ATLAS Zweiwegebagger sind anpassungsfähig und flexibel: Das computergestützte CARSY System gewährleistet optimalen Anpressdruck auf die Schienen. Die Bagger sind vielseitig einsetzbar, von Böschungsarbeiten bis hin zu Modernisierung von Gleisanlagen.

- Mehr als 30 Jahre Erfahrung
- Optimale Stabilität
 - Ermöglicht leichtes Auf- und Abgleisen
 - Bequeme Handhabung für den Bediener
- Vielseitigkeit
- Know-how in der Konstruktion
- Sicherheit
 - Automatische Selbstdiagnose
 - Notausgleisung immer gewährleistet und doppelt abgesichert
 - Schnelle Zyklen
 - Hohe Bedienfreundlichkeit

PRODUCT RANGE



MATERIAL HANDLING MACHINES

ATLAS material handlers include mobile industrial machines and industrial tracked machines, which work on applications such as scrap, wood, bulky goods, special recycling, port applications and vacuum operations.

- Fast cycle times
- Optimised handling
- Mechanical expertise
- 20 years manufacturing experience
- Reliability
- Extended life span
- Versatility
- Range of diverse equipment to meet customer expectations



CRAWLER EXCAVATORS

Maximum digging performance, large loads and superior tear-out and break-away forces thanks to excellent kinematics. Maximum power with Cummins high-performance engines. Fast, sensitive working cycles with a newly-developed Rexroth hydraulic system.

- Powerful
- Fast operating cycles
- Easy to operate
- Low fuel consumption
- Easy maintenance
- Excellent visibility

UMSCHLAGMASCHINEN

ATLAS Lademaschinen sind mobile Umschlagmaschinen und Umschlagmaschinen mit Raupenfahrwerk für den industriellen Einsatz bei z.B. Schrott, Holz, sperrigen Gütern und Recycling, in Häfen und bei Spezialarbeiten.

- Know-how in der Konstruktion
- 20 Jahre Erfahrung
- Schnelle Zyklen
- Hohe Bedienfreundlichkeit
- Zuverlässigkeit
- Lange Lebensdauer
- Vielseitigkeit
- Große Auswahl an Zusatzausrüstungen

RAUPENBAGGER

Optimale Grableistung, hohe Traglasten sowie überlegene Reiß- und Losbrechkräfte durch sehr gute Kinematik. Maximale Leistung durch Cummins Hochleistungsmotoren. Schnelle und feinfühlige Arbeitsspiele durch neu entwickeltes Rexroth-Hydrauliksystem.

- Leistungsstark
- Schnellste Arbeitszyklen
- Hohe Bedienfreundlichkeit
- Niedriger Kraftstoffverbrauch
- Perfekte Wartungsfreundlichkeit
- Optimale Rundumsicht

Page Content

- 5 Quick change devices (QCD)
- 6 Quick change devices for changing the grab with a grab - as well as Oil Quick and Verachtert
- 7 Articulation pieces - quick change, grab adaptations - Verachtert - Lehnhoff - Oil Quick
- 8 Articulation pieces - permanent installation
- 9 Grab rotation gear
- 10 Hydraulic packages - Grab extensions
- 11 Clamshell bucket for E4.2
- 12 Clamshell bucket for E8.2
- 13 Clamshell bucket for E11.2
- 14 Clamshell bucket for E12
- 15 Clamshell bucket for E32
- 16 Clamshell bucket for E31.2
- 17 Clamshell bucket for E332
- 18 Rail tongs for E332
- 19 Clamshell bucket for E332
- 20 Clamshell bucket for E2.62
- 21 Clamshell bucket for E732-2 and E832-2
- 22 Log grab for E32
- 23 Log grab for E732 and E832-2
- 24 Grapple and grab for round shafts for E32 - Beet grab for E332
- 25 Demolition and sorting grab for E332, swinging freely and with a screw adaptor
- 26 Multi-jaw grab, 5 arms, for E11.32 and E732
- 27 Multi-jaw grab, 4 arms, for E732
- 28 Multi-jaw grab 5 arm für E732
- 29 Multi-jaw grab, 4 and 5 arms, for E832-2
- 30 Connecting part for hydraulic hammer - connecting plate for welding - adapters
- 31 Product line of dippers and buckets
- 32 Attachments for a dipper: AB 1004, 1104, 1204
- 33 Bucket: standard design with ATLAS B1 tooth system or a non-serrated blade
- 34 Quick change connectors from other manufacturers suitable for backhoe bucket - additional prices
- 35 Rock bucket - HD-design with wear plates and ATLAS B2 tooth system
- 36 Rock bucket - HD-design with wear plates and ATLAS B3 and B4 tooth system
- 36 Rock bucket - HD-design with wear plates suitable for 210 - 260LC with CAT tooth system
- 37 Drainage bucket; trench lining bucket, dipper for loamy soil
- 38 Trench digger: rear blade, fixed
- 39 Trench digger: rear blade, swivel movement available
- 40 Trench digger, bucket shape with rear blade and fixed to the ground or swivelling
- 41 Multi-purpose bucket, bucket shape without rear blade, fixed or swivelling
- 42 Quick change connectors from other manufacturers suitable for trench digger - additional prices -
- 43 SWINGOTILT
- 44 Ripper tooth, heavy duty fork, load hook, capable / incapable of rotation
- 45 Pallet forks , original load-lifting magnets MOZELT
- 46 Michaelis mowing bucket

ATLAS GmbH - Atlas Str. 6 - 27777 Ganderkesee

Tel.: +49 (0) 4222 954-0 - Fax : +49 (0) 4222 954343

Offer list: Attachments for hydraulic excavators

Valid from : 01.06.2018

Quick change devices (QCD)

suitable for articulated jibs with a dipper-tipping cylinder and a reverse gear for changing
the dipper (bucket) with a dipper (bucket), the bucket with a grab or the grab with another grab

Material no.	Type designation	Arm width (mm)	Bolt Ø	with ... T load hook	Recommended excavator size	Weight (kg)	List price plus VAT
4108416	T4.20	105	35	without	1 - 2 t	20	1 450 €
3198025	T8.20	150	40	without	3 - 5 t	29	1 550 €
2521300	T11.20	168	50	without	6 - 11 t	35	1 800 €
4545448	T620V	268	60	10 - UKN8	10 - 23 t	115	3 590 €
6186126	T620VH-RH400	268	60	10 t	13 - 23 t	205	upon request
6186127	T620VH-RH440RAIL	268	60	10 t	18 - 23 t	205	upon request
T620VH-RH400 and T620VH-RH440Rail are fully hydraulic Riedlberger quick-change devices							
6141104	T620SMP2-STD	268	60	10 - UKN8	10 - 23 t	90	4 350 €
6139674	T620SMP2-EURO	268	60	10 - UKN8	10 - 23 t	98	4 350 €
4538358	T620H	268	60	10 - UKN8	10 - 23 t	130	4 150 €
with hydraulic latching; a hydraulic attachment kit for excavators is required (in conjunction with a SW (quick-coupler) joint plate and a SW (quick-coupler) load hook, a wedge with a wrench, material no. 5411278 is required)							
5445449	T63.20-270	268	60	10	9 - 23 t	181	4 100 €
suitable for work attachments with connection T63.20							
6112694	T63.20H-270	268	60	10	9 - 23 t	210	6 100 €
with hydraulic latching; a hydraulic attachment kit for excavators is required (in conjunction with a SW (quick-coupler) joint plate and a SW (quick-coupler) load hook, a wedge with a wrench, material no. 5411278 is required)							
4568445	T63.20	300	80	10	17 - 26 t	188	3 750 €
4568456	T63.20H	300	80	10	17 - 26 t	215	5 700 €
with hydraulic latching; a hydraulic attachment kit for excavators is required (in conjunction with a SW (quick-coupler) joint plate and a SW (quick-coupler) load hook, a wedge with a wrench, material no. 5411278 is required)							
6127030	T63.20-311	311	80	10	17 - 26 t	182	4 100 €
suitable for work attachments with connection T63.20							
6127051	T63.20H-311	311	80	10	17 - 26 t	215	6 100 €
with hydraulic latching; a hydraulic attachment kit for excavators is required (in conjunction with a SW (quick-coupler) joint plate and a SW (quick-coupler) load hook, a wedge with a wrench, material no. 5411278 is required)							
4551037	T620-300	300	80	10	17 - 26 t	105	3 750 €
suitable for work attachments with connection T620							
5448022	T620H-300	300	80	10	17 - 26 t	127	4 700 €
with hydraulic latching; a hydraulic attachment kit for excavators is required (in conjunction with a SW (quick-coupler) joint plate and a SW (quick-coupler) load hook, a wedge with a wrench, material no. 5411278 is required)							
6116761	T620-311	311	80	10	17 - 26 t	130	3 750 €
suitable for work attachments with connection T620							
6104952	T620H-311	311	80	10	17 - 26 t	155	4 700 €
with hydraulic latching; a hydraulic attachment kit for excavators is required (in conjunction with a SW (quick-coupler) joint plate and a SW (quick-coupler) load hook, a wedge with a wrench, material no. 5411278 is required)							
4541320	T722	forked	80	10	22 - 35 t	253	4 520 €
4541400	T722 H	forked	80	10	22 - 35 t	275	7 000 €
with hydraulic latching; a hydraulic attachment kit for excavators is required (in conjunction with a SW (quick-coupler) joint plate and a SW (quick-coupler) load hook, a wedge with a wrench, material no. 5411278 is required)							



Quick change devices for changing the grab with a grab

Material no.	Type designation	Arm width (mm)	Bolt Ø	with ... T load hook	Recommended excavator size	Weight (kg)	List price plus VAT
1491130	T610	268	60		12 - 23 t	30	590 €
		Bolts, a wedge and a wrench, bolts with centring sleeves for the holder of the quick change joint plate, load hook, etc.					
4568467	T63.10	300	80		17 - 26 t	32	750 €
		Bolts, a wedge and a wrench, bolts with centring sleeves for the holder of the quick change joint plate, load hook, etc.					
5411267	T713	345	80		26 - 50 t	24	440 €
		Bolts and a wrench, bolts with centring sleeves for the holder of the quick change joint plate, load hook, etc.					
5411278	Wedge with a wrench					12	280 €

T610



Quick-coupler system Lehnhoff - Price upon request
Quick-coupler systems Lehnhoff are delivered red painted!


Oil Quick Original quick coupler - with an attachment (for retrofitting)

6150119	SWE-OQ65-270-60	268	60	10	14 - 22 t	200	17 950 €
6157484	SWE-OQ65-300-80	300	80	10	14 - 22 t	200	17 950 €
6158079	SWE-OQ65-311-80	311	80	10	14 - 22 t	200	17 950 €
6148988	SWE-OQ70/55-270-60	268	60	10	18 - 32 t	250	22 950 €
6150150	SWE-OQ70/55-300-80	300	80	10	18 - 32 t	250	22 950 €
6096815	SWE-OQ70/55-311-80	311	80	10	18 - 32 t	250	22 950 €

Oil Quick Original quick coupler - mounted to a new excavator by the manufacturer

6160392	SWE-OQ65-270-60	268	60	10	14 - 22 t	200	17 950 €
6161197	SWE-OQ65-300-80	300	80	10	14 - 22 t	200	17 950 €
6161198	SWE-OQ65-311-80	311	80	10	14 - 22 t	200	17 950 €
6161231	SWE-OQ70/55-270-60	268	60	10	18 - 32 t	250	22 950 €
6161234	SWE-OQ70/55-300-80	300	80	10	18 - 32 t	250	22 950 €
6161235	SWE-OQ70/55-311-80	311	80	10	18 - 32 t	250	22 950 €

Schnellwechsler Verachtert

6178646	SWE CW.3.SPDL 270-60 with spindle suitable for CW20-40	268	60	7,5	13 - 21 t	220	upon request
6166385	SWE HCW.3 270-60 hydraulic suitable for CW20-40	268	60	7,5	13 - 21 t	220	upon request


 SWE HCW4 300-80LH
6181712

 Hydraulic quick change device
Oil Quick Original

ATLAS GmbH - Atlas Str. 6 - 27777 Ganderkesee

Tel.: +49 (0) 4222 954-0 - Fax : +49 (0) 4222 954343

Offer list: Attachments for hydraulic excavators

Valid from : 01.06.2018

Articulation pieces - ATLAS - quick change, connection between the articulated jib end and the grab rotation gear

Material no.	Type designation	Suitable for SWE (quick change devices)	Suitable for	Recommended excavator size	Weight (kg)	List price plus VAT
3132265	T11.40	T11.20	without wedge E11.2, E11.32	6 - 11 t	40	1 260 €
6011101	T630	T620V, T620 H, T610	without wedge E12, E31.2, E32, E332	12 - 23 t	62	1 180 €
3105911	T630 S GER.PLATTE	T620V, T620 H, T610	without wedge for welding	12 - 23 t	44	980 €
6141102	T630SMP2-STD	T620SMP2-STD	with wedge E12, E31.2,E32,E332	12 - 23 t	82	2 250 €
6139673	T630SMP2-EURO	T620SMP2-EURO	with wedge E12, E31.2,E32,E332	12 - 23 t	90	2 250 €
4568489	T63.31	T63.20 , T63.20 H	without wedge E12, E31.2, E32, E332	17 - 26 t	90	2 280 €
4568003	T63.34	T63.20 , T63.20 H	without wedge E2.62, E713, E732 E732-2	17 - 26 t	105	2 280 €
4578174	T730	T620V , T620 H	without wedge E2.62, E713, E732 E732-2	17 - 26 t	71	1 220 €
4528618	T731	T722 , T722H	with wedge E2.62, E713, E732 E732-2	17 - 35 t	118	2 250 €
4516772	T733	T713	with wedge E12, E31.2, E32, E332	17 - 35 t	84	1 880 €
3510876	T734	T713	with wedge E2.62, E713, E732 E732-2	26 - 50 t	89	1 880 €
6163524	T832-660L	T713	with wedge E832-2	26 - 50 t	150	2 090 €

Grab adaptations Schaeff

6101513	GA-SWE-TC16-E4.2		E4.2	1 - 2 t	20	730 €
---------	-------------------------	--	------	---------	----	--------------

Grab adaptations Verachtert

6119390	GA-CW20-40BR-E32	CW20 - 40br	wide version	E12, E32, E332	10 - 19 t	130	2 200 €
6160617	GA-CW20-40BR-E2.62	CW20 - 40br	wide version	E2.62, E713, E732 E732-2	26 - 50 t	118	upon request

Grab adaptations Lehnhoff

6128022	GA-MS01-E4.2	MS01 / HS01	E4.2	1 - 2 t	21	1 080 €
6128191	GA-MS03-E8.2	MS03 / HS03	E8.2	3 - 5 t	35	1 250 €
6068804	GA-MS08-E11.2	MS08 / HS08	E11.2, E11.32	6 - 11 t	65	1 550 €
6142003	GA-MS08-E12	MS08 / HS08	E12, E32, E332	5 - 12 t	60	1 550 €
6132361	GA-MS10-E32	MS10 / HS10	E12, E32, E332	10 - 19 t	170	2 680 €
6132350	GA-MS21-E32	MS21 / HS21	E12, E32, E332	19 - 26 t	205	3 250 €
6135913	GA-MS21/25-E2.62	MS21 / HS21	E2.62, E732, E732-2	19 - 35 t	228	3 650 €

Grab adaptations Oilquick (HP not necessary)

6140596	GA-OQ65-T31	OQ65	T31 required	E12, E32, E332	18 - 32 t	165	7 350 €
6140951	GA-OQ70-55-T31	OQ70-55	T31 required	E12, E32, E332	18 - 32 t	150	7 800 €
6152199	GA-OQ70-55-T64	OQ70-55	T64 required	E2.62, E732, E732-2	18 - 32 t	155	7 800 €

Additional quick couplers (SW) - grab adaptations for Lehnhoff, Verachtert and Oilquick - can be supplied upon request!



ATLAS GmbH - Atlas Str. 6 - 27777 Ganderkesee

Tel.: +49 (0) 4222 954-0 - Fax : +49 (0) 4222 954343

Offer list: Attachments for hydraulic excavators

Valid from : 01.06.2018

Articulation pieces - permanent installation, connection between the articulated jib end and a grab rotation gear

Material no.	Type designation	Altitude (mm)	Arm width (mm)	Bolt Ø	Suitable for	Recommended excavator size	Weight (kg)	List price plus VAT
3523462	T4.2	180	110	35	E4.2	1 - 2 t	4	370 €
3135600	T8.2	280	150	40	E8.2	3 - 5 t	9	500 €
2593748	T11.4	240	168	50	E11.2, E11.32	6 - 11 t	15	610 €
3168530	T21	320	268	60	E11.2, E11.32	9 - 22 t	30	960 €
1586714	T31	300	268	60	E12, E31.2, E32, E332	12 - 23 t	25	980 €
1572810	T35	250 / 350 re-arrangeable	268	60	E12, E31.2, E32, E332 mainly for grabs with low altitude	12 - 23 t	41	980 €
1572832	T36	490	268	60	E12, E31.2, E32, E332 Altitude: 490 mm long, mainly for steeply positioned jibs and telescopic articulated jibs	12 - 23 t	43	1 050 €
2228779	T64	450	268	60	E2.62, E713, E732, E732-2	17 - 26 t	60	990 €
1572854	T2.61	450	290	60	E2.62, E713, E732, E732-2	17 - 26 t	65	1 430 €
1572876	T2.62	380	290	60	E12, E31.2, E32, E332	17 - 23 t	41	1 430 €
5401743	T63.01	440	300	80	E12, E31.2, E32, E332	17 - 23 t	57	1 350 €
4568490	T63.04	400	300	80	E2.62, E713, E732, E732-2	17 - 26 t	54	1 350 €
1572912	T71	480	forked	80	E2.62, E713, E732 E732-2	17 - 35 t	60	1 410 €
1572898	T72	380	345 Industrial articulated jibs	80	E2.62, E713, E732 E732-2	17 - 35 t	55	1 150 €
2214319	T74	420	345 Industrial articulated jibs	80	E32	17 - 35 t	54	1 290 €
6104916	T72-311	450	311	80	E2.62, E713, E732 E732-2	17 - 35 t	81	1 340 €
3189057	T81	480	forked	80	E832-2	26 - 50 t	105	1 680 €
6162290	T82-630L	630	345 Industrial articulated jibs	80	E832-2	26 - 50 t	150	1 490 €



T11.4



T72



T82-630L



T31

ATLAS GmbH - Atlas Str. 6 - 27777 Ganderkesee

Tel.: +49 (0) 4222 954-0 - Fax : +49 (0) 4222 954343

Offer list: Attachments for hydraulic excavators

Valid from: 01.06.2018

Grab rotation gear, hydraulically advancing by an oil engine, capable of rotation

Material no.	Type designation		Recommended excavator size	Weight (kg)	List price plus VAT
6135920	E4.2	without a grab cylinder	1 - 2 t	19	2 290 €
3175200	E8.2	with a grab cylinder	3 - 5 t	90	5 850 €
4512507	E11.2	with a grab cylinder	6 - 11 t	140	6 300 €
4513042	E11.32	without a grab cylinder	6 - 11 t	65	3 750 €
6030688	E12	with a grab cylinder	10 - 15 t	200	6 850 €
6030684	E31.2	with a grab cylinder	12 - 23 t	215	7 500 €
6014722	E32	with a grab cylinder	12 - 23 t	230	6 500 €
6015121	E332	without a grab cylinder	12 - 23 t	90	4 250 €
4514190	E2.62	with a grab cylinder	17 - 35 t	380	9 750 €
3593999	E713	with a grab cylinder, for a deep-grab gear suitable for all kinds of E32 grabs, E35 - E310.5 E714 is required as extension	17 - 35 t	320	upon request
4515511	E732	without a grab cylinder	17 - 35 t	150	5 000 €
5453052	E732-2	without a grab cylinder, with 2 rotary motors	17 - 35 t	170	6 700 €
6077949	E832-2	without a grab cylinder, with 2 rotary motors	25 - 50 t	200	7 500 €



ATLAS GmbH - Atlas Str. 6 - 27777 Ganderkesee

Tel.: +49 (0) 4222 954-0 - Fax : +49 (0) 4222 954343

Offer list: Attachments for hydraulic excavators

Valid from : 01.06.2018

Hydraulic package (compl. SL- connection, articulated jib - grab rotation gear with SV-couplings)

Material no.	Type designation	Grab rotation gear	Articulation piece SW (quick coupler) articulation piece	ATLAS excavator	Arm width (mm)	SL - size and length	List price plus VAT
3173628	HP-E8.2-T8.4	E8.2	T8.2	804	150	SL 8 x 1600 SL 10 x 1600	300 €
3168392	HP-E11.2-T11.4	E11.2 , E11.32	T11.4 T21	1004 1104, 1204	168 268	SL 10 x 1350 SL 16 x 1500	370 €
5440126	HP-E11.2-11.40	E11.2 , E11.32	T11.40	1004	168	SL 10 x 1350 SL 16 x 1500	500 €
5416137	HP-E12-T31	E12	T31	1104/1204	268	SL 10 x 1600 SL 16 x 1600	400 €
5412393	HP-E12-T630	E12	T630	1104/1204	268	SL 10 x 1600 SL 16 x 1700	500 €
5441514	HP-E32-T31	E32, E 332, E31.2	T31, T35	12-1605,1604 /1705 130W-170W	268	SL 10 x 1600 SL 20 x 1700	450 €
5400742	HP-E32-T630	E32, E332, E31.2	T630	12-1605,1604 /1705 130W-170W	268	SL 10 x 1600 SL 20 x 1800	550 €
5404008	HP-E32-T63.01	E32, E332	T63.01, T63.31	1605,1705,1805,1905 190W, 220W	300	SL 10 x 2000 SL 20 x 1800	450 €
5404031	HP-E2.62-T64	E2.62,E732,E732-2	T64, T730	12-1605,1604 /1705 130-170W 1705 (T620-300) 190W, 220W (T620-300)	268 (300)	SL 10 x 1600 SL 20 x 2000	450 €
5401709	HP-E2.62-T63.04	E2.62,E732,E732-2	T63.04, T63.34	2005,2205 190W, 220W	300	SL 10 x 1800 SL 20 x 2000	550 €
5404019	HP-E2.62-T71	E2.62, E72 E732, E732-2, E832-2	T71, T731, T81, T831, GA-MS10	1704 - 1804	gegabelt	SL 10 x 2300 SL 20 x 2300	550 €
5412439	HP-E2.62-T72	E2.62, E72 E732, E732-2, E832-2	T72, T734	and telescopic 270MH, 350MH	345	SL 10 x 1600 SL 20 x 1600	450 €
3178645	HP-E732-T64	E32, E 332, E 31.2 E2.62,E732,E732-2	T36, T630 T64 , T730	1705 Indust. and telescopic 180MH,200MH	268	SL 10 x 1800 SL 20 x 1700	450 €
6079002	HP-E732-T64-MI	E32, E332, E31.2 E2.62,E732,E732-2	T630, T2.61, T2.62	1604Mi, 230MH AB1622	268 290	SL 10 x 1800 SL 20 x 2000	450 €
5412440	HP-E832-2-T832-MI	E832-2	T832, T82	1804MI,350MH Ind. and telescopic	345	SL 10 x 1800 SL 20 x 1800	450 €
6041142	HP-E832-2-T832	E2.62, E732, E732-2, E832-2	T72, T734, T82, T832	5205, 520MH	345	SL 10 x 2300 SL 20 x 2300	550 €

Grab extensions


Material no.	Type designation	Length (mm)	Suitable for	Weight (kg)	List price plus VAT
0727633	E34	1000	with 4 hoses	E32	65 2 300 €
0742267	E34.1	1 500	with 4 hoses	E32	90 2 360 €
0732572	E34.2	2 000	with 4 hoses	E32	115 2 420 €
In order to connect the two extensions E34-E34.2 you need extra 1x for each :					
6151206	Connecting tube short			0,5	80 €
6151207	Connecting tube long			0,5	80 €
0728598	E74	1 000	with 2 hoses	E2.62, E732	130 4 850 €
0742278	E74.2	2 000	with 2 hoses	E2.62, E732	200 5 450 €
3594014	E714	2 000	with 2 hoses	E713	110 2 950 €



Clamshell grab with a horizontal grab cylinder

Grab rotation gear E 4.2 is required


Material no.	Type designation	Width	Litres		Recommended excavator size	Weight KG	List price plus VAT
3511731	E4.5	270	40	with an ejector 3 screw teeth	1 - 2 t	80	3 250 €
3511800	E4.6	350	50	with an ejector 4 screw teeth	1 - 2 t	90	3 680 €

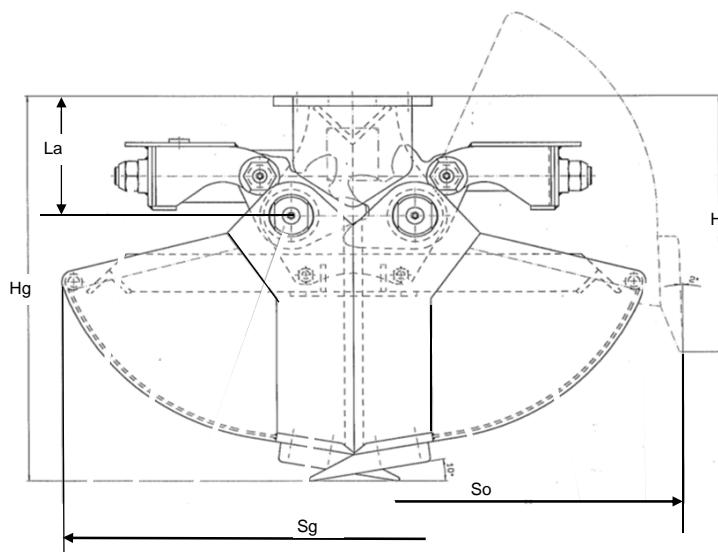

Type desig	Material No	Hg	Ho	LA	Sg	So
E4.5	3511731	515	344	160	730	820
E4.6	3511800	515	344	160	730	820
Altitude of rotation gear E4.2 incl. T4.2 = 320 mm						
Operating pressure: max 200 bar						

Clamshell bucket without a grab cylinder
Grab rotation gear E8.2 is required

Material no.	Type designation	Width	Litres		Recommended excavator size	Weight KG	List price plus VAT
3173844	E8.5	200	50	with an ejector 3 screw teeth	3 - 5 t	112	3 160 €
3173946	E8.6	270	70	with an ejector 3 screw teeth	3 - 5 t	120	3 450 €
3174027	E8.7	450	100	without an ejector 3 screw teeth	3 - 5 t	127	3 600 €
6102084	E8.7.5	450	100	with an ejector 3 screw teeth	3 - 5 t	130	3 800 €

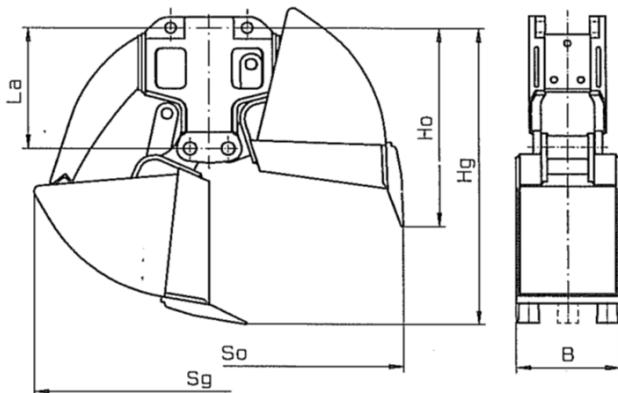

E8.5 - E8.7



Type designation	Material No.	Hg	Ho	LA	Sg	So
E8.5	3173844	815	545	331	910	1000
E8.6	3173946	815	545	331	910	1000
E8.7	3174027	815	545	331	910	1000
E8.7.5	6102084	as E8.7 but with an ejector				

Altitude of rotation gear E8.2 incl. T8.4 = 611 mm
Operating pressure: max 200 bar

 GAMS03 6128191
m.
E8.2 + E8.7

ATLAS GmbH - Atlas Str. 6 - 27777 Ganderkesee

Tel.: +49 (0) 4222 954-0 - Fax : +49 (0) 4222 954343


Offer list: Attachments for hydraulic excavators

Valid from: 01.06.2018

Clamshell bucket without a grab cylinder

Grab rotation gear E 11.2 is required

Material no.	Type designation	Width	Litres		Recommended excavator size	Weight KG	List price plus VAT
2553819	E11.5	300	110	with an ejector 3 screw teeth	6 - 11 t	240	4 070 €
2553886	E11.6	400	150	with an ejector 3 screw teeth	6 - 11 t	220	4 100 €
2553466	E11.7	600	220	without an ejector 5 screw teeth	6 - 11 t	258	4 370 €
2553740	E11.7.5	600	220	with an ejector 5 screw teeth	6 - 11 t	295	4 950 €
6035451	E11.8	800	450	without an ejector 7 screw teeth	6 - 11 t	390	5 650 €

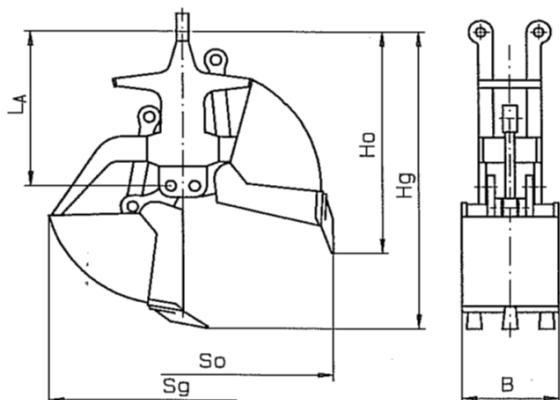

E11.5 - E11.8


Type designation	Material No.	Hg	Ho	LA	Sg	So
E11.5	2553819	1300	930	675	1120	1300
E11.6	2553886	1300	930	675	1120	1300
E11.7	2553466	1300	930	675	1120	1300
E11.7.5	2553740	as E11.7 but with an ejector				
E11.8	6035451	1425	945	675	1378	1542
Altitude of rotation gear E11.2 incl. T11.4 = 630 mm						
Operating pressure: max 250 bar						



Clamshell bucket without a grab cylinder

Grab rotation gear E 12 is required

Material no.	Type designation	Width	Litres		Recommended excavator size	Weight KG	List price plus VAT
1419201	E15	300	170	with an ejector 3 screw teeth	10 - 15 t	370	4 650 €
1419198	E16	400	210	with an ejector 3 screw teeth	10 - 15 t	390	4 600 €
1922609	E16 - 500	500	280	with an ejector 4 screw teeth	10 - 15 t	413	5 350 €
1419176	E17	600	300	without an ejector 5 screw teeth	10 - 15 t	390	4 980 €
1497590	E17.1	ejector for retrofitting from E17 to E17.5 4 bolts 1973882 are required.				40	750 €
1419187	E17.5	600	300	with an ejector 5 screw teeth	10 - 15 t	410	5 600 €
1419165	E19	800	400	without an ejector 7 screw teeth	10 - 15 t	420	5 650 €

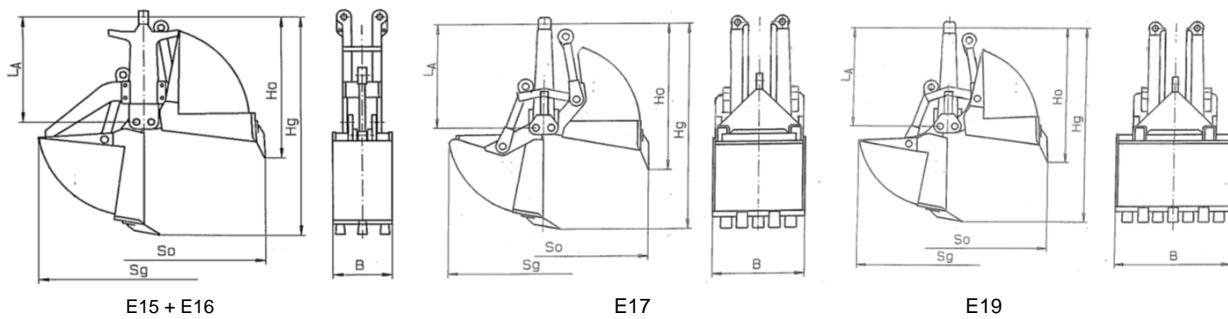

E15 + E16

E17

E19

Type designation	Material No.	Hg	Ho	LA	Sg	So
E15	1419201	1520	1025	745	1430	1620
E16	1419198	1520	1025	745	1430	1620
E16-500	1922609	1520	1025	745	1430	1620
E17	1419176	1375	985	700	1240	1420
E17.5	1419187	as E17 but with an ejector				
E19	1419165	1375	985	700	1240	1420

Altitude of rotation gear E12 incl. T31 = 827 mm
Operating pressure: max 250 bar






E15



T35S F. CASE WX120 6152339
E12 + E19

Clamshell bucket without a grab cylinder
Grab rotation gear E 32 is required

Material no.	Type designation	Width	Litres		Recommended excavator size	Weight KG	List price plus VAT
1517324	E35	300	180	with an ejector 3 screw teeth, load hook 5 t	12 - 23 t	470	5 150 €
1517222	E36	400	250	with an ejector 3 screw teeth, load hook 5 t	12 - 23 t	500	5 250 €
3081296	E37	500	300	with an ejector 4 screw teeth, load hook 5 t	12 - 23 t	530	5 750 €
1517131	E38	600	350	without an ejector 5 screw teeth, eylet for shackle 5 t	12 - 23 t	500	5 400 €
1512534	E38.1	ejector for retrofitting from E38 to E38.5 4 bolts 0586530 are required.				68	1 070 €
1517120	E38.5	600	350	with an ejector 5 screw teeth, eylet for shackle 5 t	12 - 23 t	580	6 500 €
1517415	E39	800	450	without an ejector 7 screw teeth, eylet for shackle 5 t	12 - 23 t	580	5 950 €
1512545	E39.1	ejector for retrofitting from E39 to E39.5 4 bolts 0586530 are required.				78	1 200 €
1517404	E39.5	800	450	with an ejector 7 screw teeth, eylet for shackle 5 t	12 - 23 t	670	7 100 €
3081309	E310	1000	560	without an ejector 9 screw teeth, eylet for shackle 5 t	12 - 23 t	660	7 650 €
2545400	E310.1	ejector for retrofitting from E310 to E310.5 4 bolts 0586530 are required.				90	1 320 €
2545364	E310.5	1000	560	with an ejector 9 screw teeth, eylet for shackle 5 t	12 - 23 t	750	8 950 €
4685674	LASTH. 5TO	load hook 5 t for welding				5	260 €

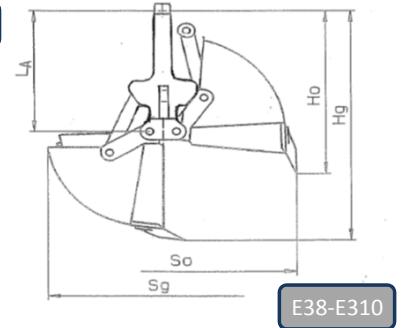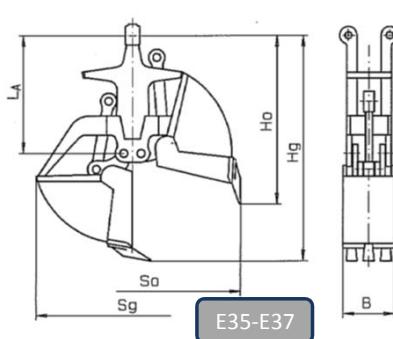


Type designation	Material No.	Hg	Ho	LA	Sg	So
E35	1517324	1615	1145	840	1465	1630
E36	1517222	1615	1145	840	1465	1630
E37	3081296	1615	1145	840	1465	1630
E38	1517131	1520	1070	800	1390	1550
E38.5	1517120	as E38 but with an ejector				
E39	1517415	1520	1070	800	1390	1550
E39.5	1517404	as E39 but with an ejector				
E310	3081309	1520	1070	800	1390	1550
E310.5	2545364	as E310 but with an ejector				
E310-700L o.Zi. 6153154		1620	1070	800	1590	1750

Altitude of rotation gear E32 incl. articulation piece T31 = 951 mm
Operating pressure: max 300 bar



Clamshell bucket without a grab cylinder, short design
Grab rotation gear E 31.2 is required

Material no.	Type designation	Width	Litres		Recommended excavator size	Weight KG	List price plus VAT
4533659	E31.42	280	105	with an ejector 3 screw teeth	12 - 23 t	375	5 600 €
4532409	E31.43	300	180	with an ejector 3 screw teeth	12 - 23 t	434	6 400 €
4533580	E31.44	400	240	with an ejector 4 screw teeth	12 - 23 t	465	8 150 €
3594649	E31.46	600	350	without an ejector 5 screw teeth	12 - 23 t	445	6 650 €
3590634	E31.48	800	460	without an ejector 7 screw teeth	12 - 23 t	522	7 850 €
6065939	E31.50	1 000	590	without an ejector 7 screw teeth	12 - 23 t	570	8 500 €
4532227	E31.52	1 200	690	without an ejector 9 screw teeth	12 - 23 t	650	9 500 €
4685674	LASTH. 5TO	load hook 5 t for welding				5	260 €

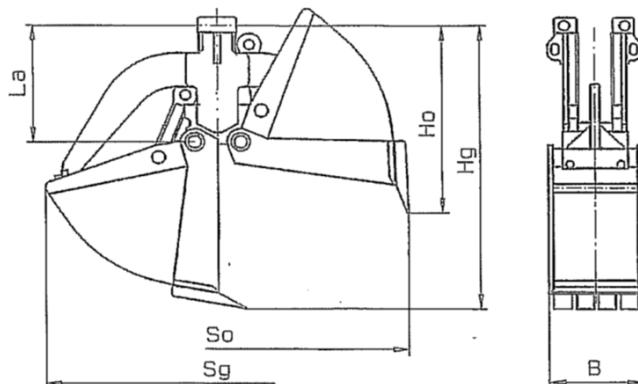
E31.2 + E31.42

Type designation	Material No.	Hg	Ho	LA	Sg	So
E31.42	4533659	1145	835	532	1210	1350
E31.43	4532409	1295	855	532	1490	1650
E31.44	4533580	1295	855	532	1490	1650
E31.46	3594649	1265	830	532	1400	1550
E31.48	3590634	1265	830	532	1400	1550
E31.50	6065939	1265	830	532	1400	1550
E31.52	4532227	1265	830	532	1400	1550

Altitude of rotation gear E31.2 incl. T31 = 700 mm

Operating pressure: max 300 bar


E31.42

E31.46




E31.48

**Clamshell bucket with two vertical grab cylinders
and a rotary feed system, short design, grab rotation gear E 332 is required**

Material no.	Type designation	Width	Litres		Recommended excavator size	Weight	List price plus VAT
4584605	E343	280	100	with an ejector Openings dimensions 1.350 above the teeth Grab for gripping in between the sleepers	12 - 23 t	472	8 600 €
6125592	E343-600	600	220	with an ejector Openings dimensions 1.350 above the teeth	12 - 23 t	551	9 450 €
4685674	LASTH. 5TO			load hook 5 t for welding		5	260 €

**Clamshell bucket with two horizontal grab cylinders
and a rotary feed system, short design, grab rotation gear E 332 is required**

Material no.	Type designation	Width	Litres		Recommended excavator size	Weight	List price plus VAT
1420942	E344	600	350	without an ejector 5 screw teeth	12 - 23 t	490	8 150 €
1420953	E345	700	400	without an ejector 5 screw teeth	12 - 23 t	585	8 950 €
1420964	E346	800	450	without an ejector 7 screw teeth	12 - 23 t	610	8 600 €
2580298	E348	1 000	560	without an ejector 7 screw teeth	12 - 23 t	640	9 850 €
4685674	LASTH. 5TO			load hook 5 t for welding		5	260 €

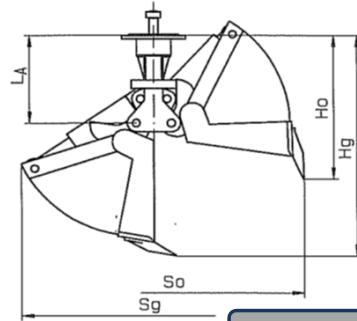

Type designation	Material No.	Hg	Ho	LA	Sg	So
E343	4584605	1190	905	590	1120	1350
E344	1420942	1295	830	520	1475	1650
E346	1420964	1295	830	520	1475	1650
E348	2580298	1295	830	520	1475	1650

Altitude of rotation gear E332 incl. T31 = 667 mm
Operating pressure: max 300 bar



E343




E346



T630 + E332 + E346

**Rail tongs with two vertical grab cylinders
and a rotary feed system; short design. A grab rotation gear E 332 is required**

Material no.	Type designation	Width	Litres	Recommended excavator size	Weight KG	List price plus VAT
6190118	E343-300-SZ	300 ÖM 510 mm	with 5 t welded load hook	12 - 23 t	365	9 300 €
6191577	E343-600-SZ	600 ÖM 510 mm	with 5 t welded load hook	12 - 23 t	400	9 900 €

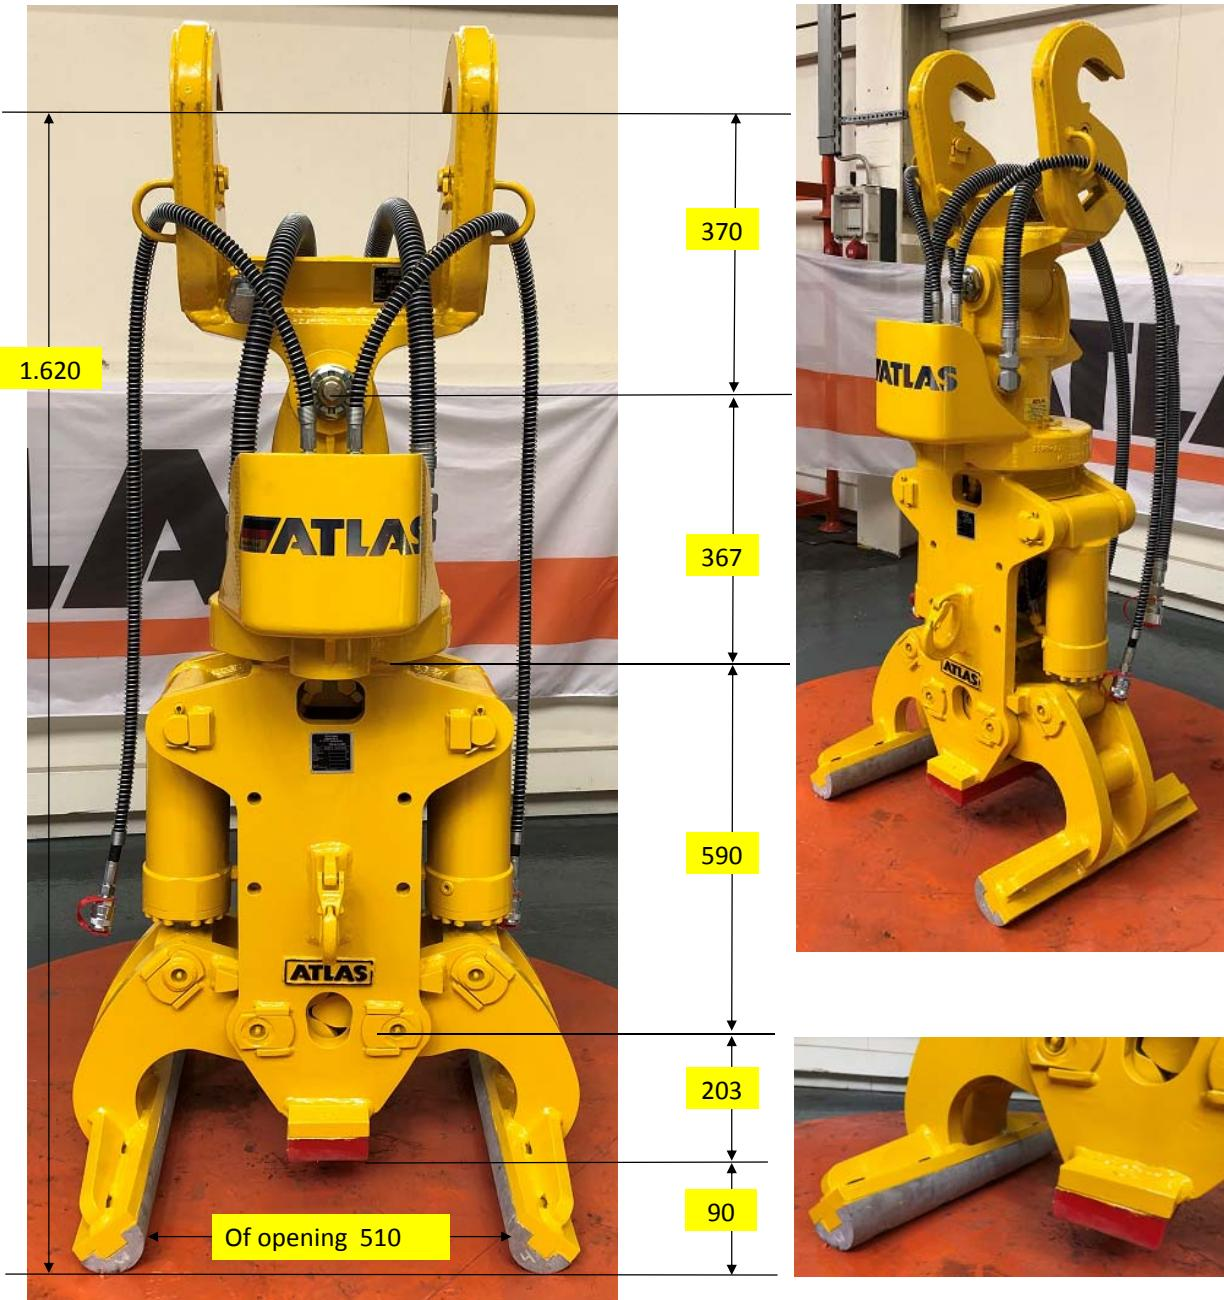


Altitude of rotation gear E332 incl. T630 = 737 mm

Altitude of rotation gear E332 incl. T31 = 667 mm

Operating pressure: max 300 bar

**Clamshell bucket with a grab cylinder and a rotary feed system,
short design, grab rotation gear E 332 is required**

Material no.	Type designation	Width	Litres	Recommended excavator size	Weight	List price plus VAT
1597295	E334	Ballast grab Opening dimensions: 800 x 800	110 with an ejector 6 screw teeth	12 - 23 t	490	10 500 €
1597308	E336	Ballast grab Opening dimensions: 600 x 1200	200 with an ejector 5 screw teeth	12 - 23 t	510	10 400 €
4685674	LASTH. 5TO	load hook 5 t for welding			5	260 €

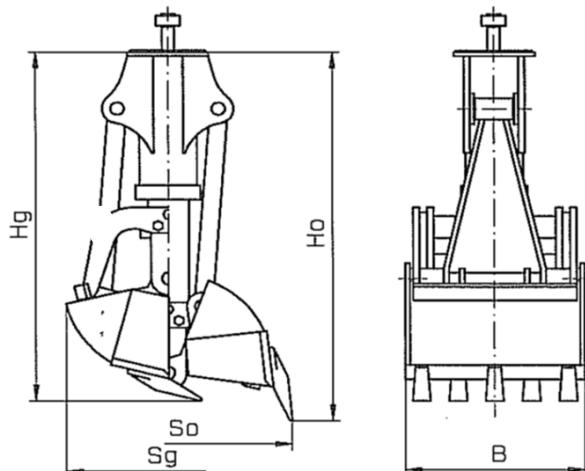

Type designation	Material No.	Hg	Ho	Sg	So
E334	1597295	1235	1305	670	800
E336	1597308	1437	1340	1030	1200


Altitude of rotation gear E332 incl. T31 = 667 mm

Operating pressure: max 300 bar

Clamshell bucket without a grab cylinder

Grab rotation gear E 2.62 is required

Material no.	Type designation	Width	Litres		Recommended excavator size	Weight KG	List price plus VAT
0743780	E2.66	600	450	with an ejector 4 screw teeth	17 - 35 t	750	9 050 €
0743791	E2.67	850	600	without an ejector 7 screw teeth	17 - 35 t	890	11 500 €
6014972	E75.32	1210	1200	without an ejector without teeth	17 - 35 t	1195	14 000 €
6000759	E75.33	1210	1500	without an ejector without teeth	17 - 35 t	1270	15 900 €
6152286	E75.33 HD	1210	1500	without an ejector without teeth	17 - 35 t	1290	21 200 €
6144538	E75.35	1460	1800	without an ejector without teeth	25 - 35 t	1280	17 000 €
6023077	E75.36	1610	2000	without an ejector without teeth	25 - 35 t	1340	17 550 €
6174310	E75.36 HD	1610	2000	without an ejector without teeth	25 - 35 t	1510	22 950 €
3592589	E75.37	2010	2500	without an ejector without teeth	25 - 35 t	1480	19 150 €
6150177	E75.38	2010	3000	without an ejector without teeth	25 - 35 t	1550	22 800 €
6089753	E75.40	2610	4000	without an ejector without teeth	25 - 35 t	1800	23 200 €

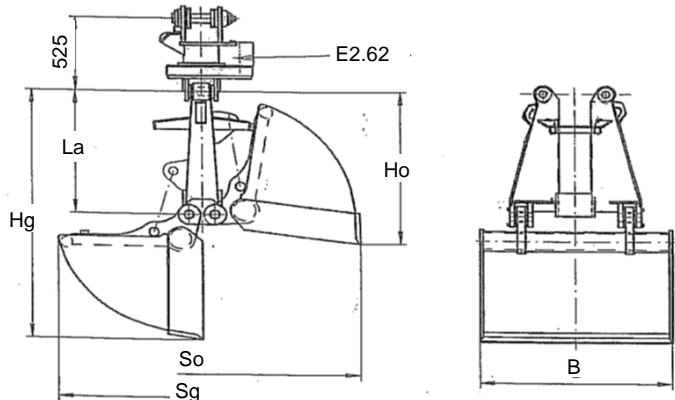

GA OQ 70-55
E2.62 + E2.67


Type designation	Material No.	Hg	Ho	LA	Sg	So
E2.66	0743780	1690	1125	940	1570	1625
E2.67	0743791	1690	1204	875	1510	1710
E75.32	6014972	1785	1080	875	1800	1940
E75.33	6000759	1885	1090	875	2076	2140
E75.33HD	6152286	1885	1090	875	2076	2140
E75.35	6144538	1885	1090	875	2076	2140
E75.36	6023077	1885	1090	875	2076	2140
E75.36HD	6174310	1885	1090	875	2076	2140
E75.37	3592589	1885	1090	875	2076	2140
E75.38	6150177	1985	1106	875	2276	2337
E75.40	6089753	1985	1106	875	2276	2337

Altitude of rotation gear E2.62 incl. articulation piece T72 = 905 mm

Operating pressure: max 300 bar



E2.62 + E2.67

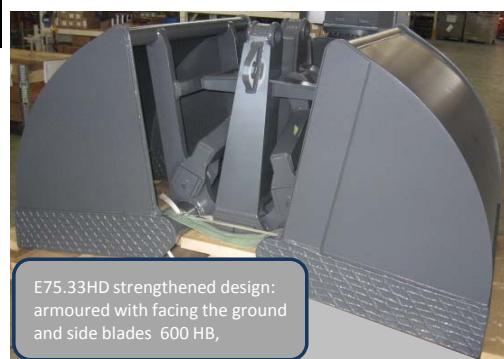

E75.33HD strengthened design:
armoured with facing the ground
and side blades 600 HB,

ATLAS GmbH - Atlas Str. 6 - 27777 Ganderkesee

Tel.: +49 (0) 4222 954-0 - Fax : +49 (0) 4222 954343

Offer list: Attachments for hydraulic excavators


Valid from: 01.06.2018

Clamshell grab with a horizontal grab cylinder Grab rotation gear E 732-2 is required


Material no.	Type designation	Width	Litres		Recommended excavator size	Weight KG	List price plus VAT
6173856	E740H-100	1000	1000	without an ejector without teeth	17 - 35 t	1080	21 200 €
6173857	E740H-200	2000	2000	without an ejector without teeth	17 - 35 t	1480	23 500 €

Clamshell grab with a horizontal grab cylinder Grab rotation gear E 832-2 is required

6157065	E940H-100	1000	1250	without an ejector without teeth	25 - 50 t	1660	29 800 €
6156173	E940H-200	2000	2500	without an ejector without teeth	25 - 50 t	2070	32 400 €

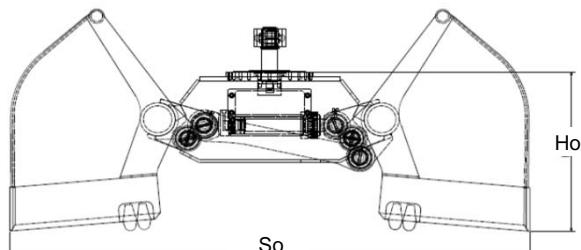

E740H-100
E740H-200

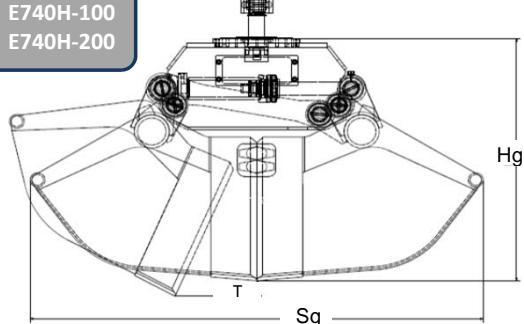

Side blades Hardox 400
Floor blades Hardox 500

Type designation	Material No.	Hg	Ho	T	Sg	So
E740H-100	6173856	1.114	732	80	1971	2.264
E740H-200	6173857	1.114	732	80	1971	2.264
E940H-100	6157065	1.308	865	95	2245	2.681
E940H-200	6156173	1.325	926	95	2245	2.681




T832 + E832-2 + E940H-100



T82 + E832-2 + E940H-200

Grapple and grab for round shafts without a grab cylinder
Grab rotation gear E 32 is required

Material no.	Type designation	Width	DU (Ø) / QM (sq.m.)	Suitable for, and required	Recommended excavator size	Weight (kg)	List price plus VAT
1420931	E323	Grab for bundles of wood and tree trunks 600	DU 200 -1.000	E32	12 - 23 t	400	6 100 €
1420895	E324	Round log grab 700	1 QM	E32	12 - 23 t	480	7 250 €

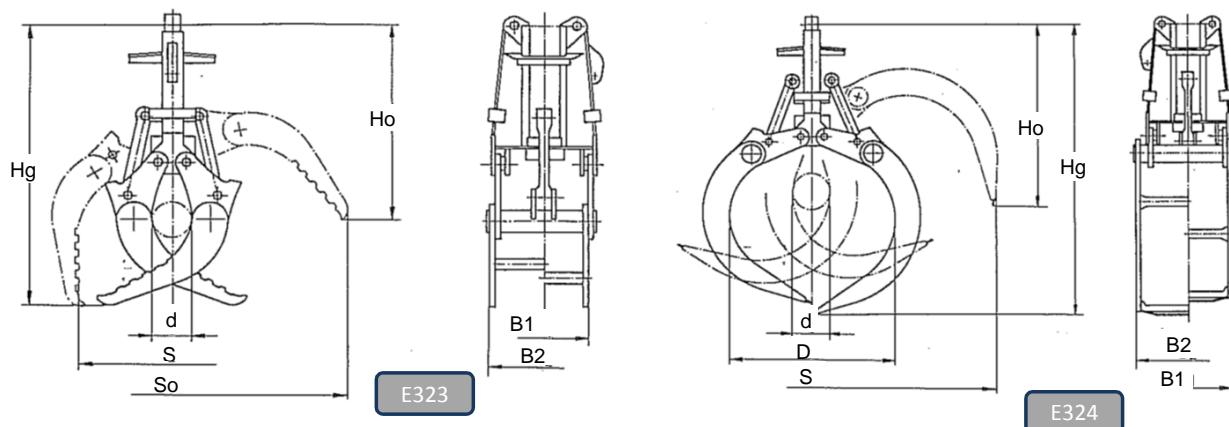



Type designation	Hg	Ho	d	D	S	So	B1	B2
E323	1660	1120	200		1030	1880	480	600
E324	2060	1300	250	1160	2420		590	700

Altitude of rotation gear E32 incl. T31 = 951 mm
 Operating pressure: max 300 bar



Log grab with a grab cylinder and rotary feed system
Grab rotation gear E732 / E832-2 is required

Material no.	Type designation	Width	QM	Suitable for, and required	Recommended excavator size	Weight (kg)	List price plus VAT
6075763	E624/2V	LOG GRAB 780	1	E732, E732-2	17 - 35 t	1000	17 400 €
6015584	E724/2V	LOG GRAB 800	1,3	E732, E732-2	17 - 35 t	1050	17 500 €
6029406	E824/2V	LOG GRAB 780	1,8	E732-2	25 - 35 t	1075	19 200 €
6068171	E94.61	LOG GRAB 1000	2	E832-2	35 - 50 t	1600	31 000 €
6032675	E924/1H	LOG GRAB 850	2,5	E832-2	35 - 50 t	1680	26 650 €

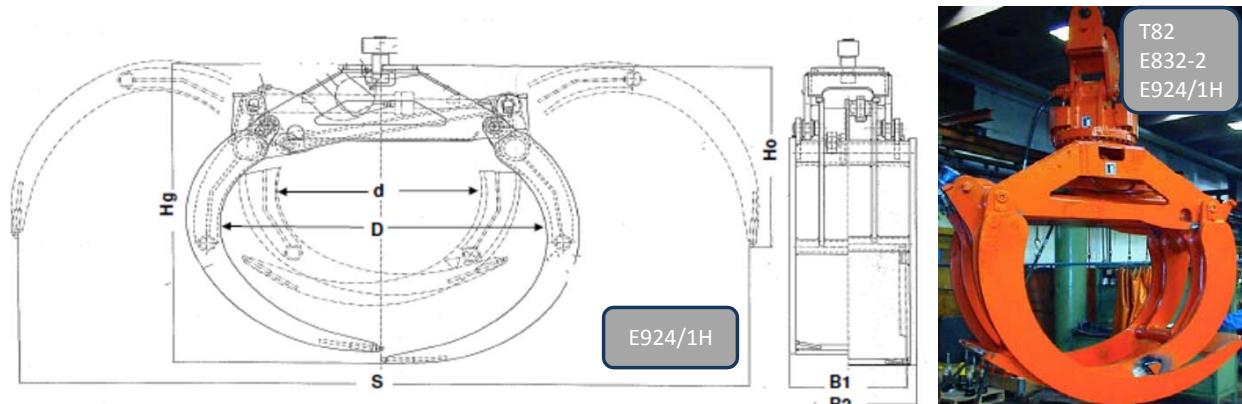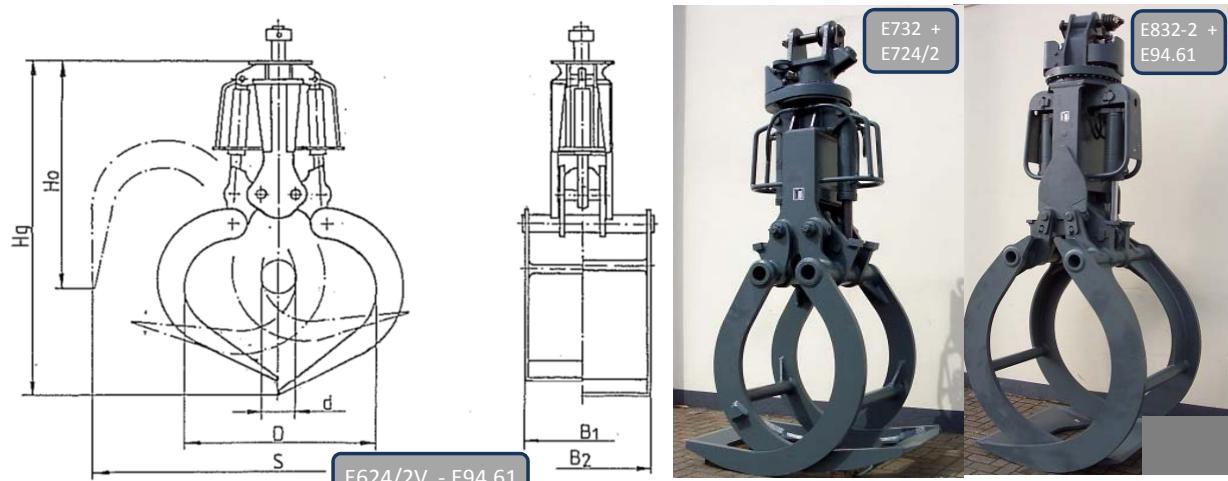

Type designation	Hg	Ho	d	D	S	B1	B2
E624/2V	2050	1280	200	1150	2450	660	780
E724/2V	2260	1300	300	1400	2980	690	800
E824/2V	2500	1370	400	1710	3470	660	780
E94.61	2800	1600	500	1640	3515	865	1000
E924/1H	2137	1290	1270	2020	4530	730	850

Altitude of rotation gear E732 incl. T72 = 796 mm

Altitude of rotation gear E832 incl. T82 = 940 mm


Operating pressure: max 300 bar

Grapple and grab for round shafts without a grab cylinder
Grab rotation gear E 32 is required

Material no.	Type designation	Width	Litres	Recommended excavator size	Weight (kg)	List price plus VAT
1542949	E325	Grapple 1250	650	with an ejector 16 weld-on teeth	12 - 23 t	650 10 100 €
720976	E375	Grab for round shafts Ø 900		with an ejector without teeth	12 - 23 t	330 7 550 €
720987	E376	Grab for round shafts Ø 1.000		with an ejector without teeth	12 - 23 t	370 8 450 €
720998	E377	Grab for round shafts Ø 1.100		with an ejector without teeth	12 - 23 t	480 9 600 €
3514381	E378	Grab for round shafts Ø 1.200		with an ejector without teeth	12 - 23 t	520 10 750 €
6156716	Teeth set for E375 - E378	Optional! (5x 0829589 3 holes) Price incl. drill of the cutting			Extra cost:	1 350 €

Beet grab with two horizontal grab cylinders
and rotary feed system, short design, grab rotation gear E 332 is required

Material no.	Type designation	Width	Litres	Recommended excavator size	Weight (kg)	List price plus VAT
5433865	E330	1 300	1 000	without an ejector	12 - 23 t	850 upon request
5433570	E630	1 650	1 300	without an ejector	12 - 23 t	950 upon request
4685674	LASTH. 5TO	load hook 5 t for welding			5	230 €

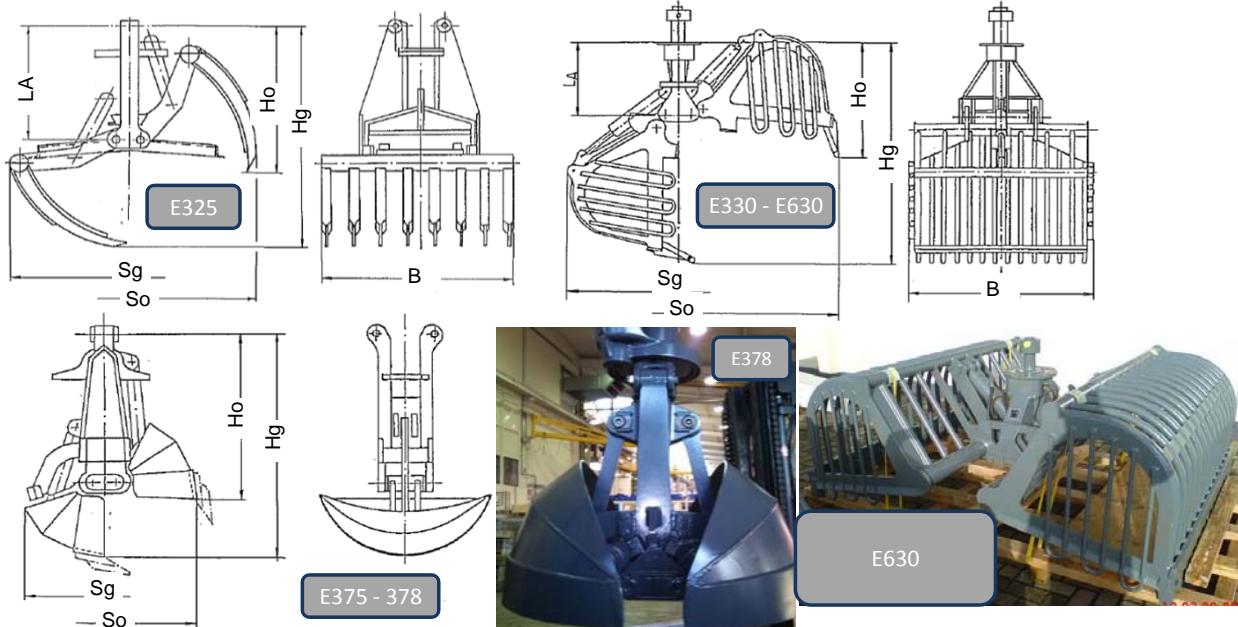

Type designation	Hg	Ho	LA	Sg	So
E325	1660	1020	800	1500	1410
E375	1225	970	840	840	DU900
E376	1275	980	840	940	DU1000
E377	1285	950	800	1030	DU1100
E378	1335	960	800	1130	DU1200
E330	1600	860	520	1550	2280
E630	1600	860	520	1550	2280

Altitude of rotation gear E32 incl. T31 = 951 mm

Altitude of rotation gear E332 incl. T31 = 667 mm

Operating pressure: max 300 bar



**Sorting grab, swinging freely
Grab rotation gear E 332 is required**

Material no.	Type designation	Width	Litres		Recommended excavator size	Weight (kg)	List price plus VAT
5459901	E337	1 Zyl.	1055	300	Metal ribs	13 - 23 t	740 13 900 €

**Sorting grab, swinging over a dipper-tipping cylinder
for sorting and for light demolition works!**


Material no.	Type designation	Width	Litres		Recommended excavator size	Weight (kg)	List price plus VAT
6144921	E150-800	1 cyl.	800	300	Metal ribs	11 - 15 t	740 21 950 €
6145719	E150-800LR	1 cyl.	800	300	Opening rear wall	11 - 15 t	730 21 950 €
6135271	E200-1000	2 cyl.	1000	400	Metal ribs	13 - 20 t	1090 24 950 €
6145720	E200-1000LR	2 cyl.	1000	400	Opening rear wall	13 - 20 t	1070 24 950 €
6144890	E270-1200	2 cyl.	1200	800	Metal ribs	20 - 27 t	1600 31 950 €
6145731	E270-1200LR	2 cyl.	1200	800	Opening rear wall	20 - 27 t	1600 31 950 €
6145765	HP E150-270				Hydraulic package	11	430 €

Screw adaptor suitable for demolition and sorting grab E150 - E270

6144313	SA-FEST-270	Screw adapter for permanent installation, arm width 268, DU 60	115	1 850 €
6166110	SA-FEST-300	Screw adapter for permanent installation, arm width 300, DU 80	130	2 880 €
6125048	SA-T620	Screw adapter for T620V, T620H	115	1 430 €
6140268	SA-T63.20	Screw adapter for T63.20	190	3 150 €
6135747	SA-MS10	Screw adapter for Lehnhoff MS10	140	2 570 €
6135735	SA-MS21	Screw adapter for Lehnhoff MS21	180	2 850 €
6147869	SA-CW20-40	Screw adapter for Verachtert CW20/40	164	3 400 €
6157024	SA-SW33-E150-270	Screw adapter for Liebherr SW33-E150-270	180	2 950 €
6164922	SA-SW48-E150-270	Screw adapter for Liebherr SW48-E150-270	200	3 400 €
6159207	SA-OQ65	Screw adapter for OilQuick OQ65	350	8 200 €
6168113	SA-OQ70/55	Screw adapter for OilQuick OQ70/55	390	8 800 €

Screw adalter, swinging

6154187	SA-E150-E270-T31	SCREW ADAPTER FIXED SA-E150-E270-T31	100	1 800 €
6159291	SA-E150-E270-T72	SCREW ADAPTER FIXED SA-E150-E270-T72	120	1 870 €


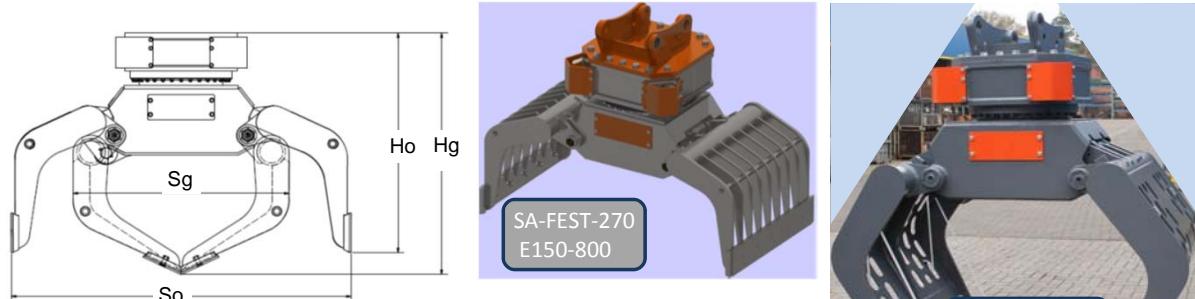


Type designation	Hg	Ho	Sg	So
E337	1040	824	1070	1770
E150-800	1193	1060	1000	1583
E150-800LR	1193	1060	1000	1583
E200-1000	1366	1243	1155	1819
E200-1000LR	1366	1243	1155	1819
E270-1200	1575	1403	1404	2243
E270-1200LR	1575	1403	1404	2243



Multi-jaw grab with 5 grab cylinders and rotary feed system
Grab rotation gear is required

Material no.	Type designation	Grab shells Number and shape	Litres	Suitable for, grab rotation gear	Recommended excavator size	Weight (kg)	List price plus VAT
1446191	E121	5 x semi-closed	275	E11.32	6 - 11 t	610	13 250 €
2511762	E122	5 x completely closed	275	E11.32	6 - 11 t	650	15 200 €
4553835	E320	5 x open	350	E732, E732-2	12 - 25 t	995	18 800 €
5448680	E321	5 x semi-closed	350	E732, E732-2	12 - 25 t	1040	19 500 €
6027107	E322	5 x completely closed	350	E732, E732-2	12 - 25 t	1083	21 200 €

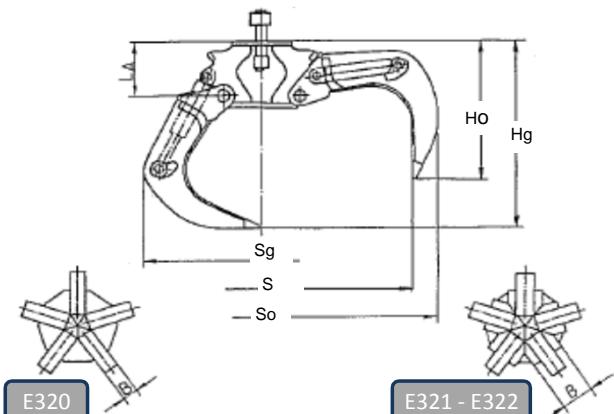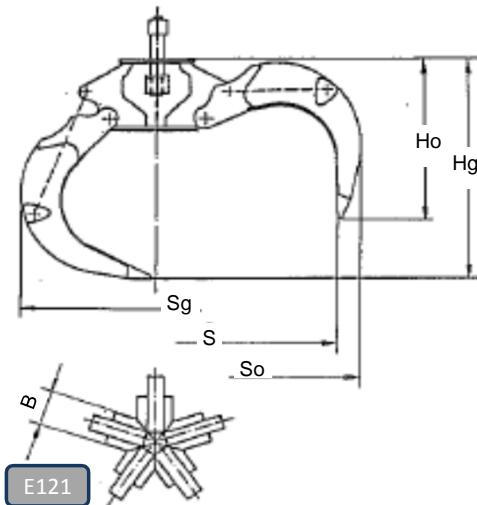

Type designation	Hg	Ho	Sg	So	S	B
E121	1035	750	1230	1850	1650	320
E122	1035	750	1230	1850	1650	575
E320	1170	905	1430	2050	1750	200
E321	1170	905	1430	2050	1750	350
E322	1170	905	1430	2050	1750	625

Altitude of rotation gear E11.32 incl. T11.4 = 554 mm

Pressure: max. 250 bar


Altitude of rotation gear E732 incl. T64 = 870 mm

Pressure: max. 300 bar



Multi-jaw grab with 4 grab cylinders and rotary feed system
Grab rotation gear is required

Material no.	Type designation	Grab shells Number and shape	Litres	Suitable for, grab rotation gear	Recommended excavator size	Weight (kg)	List price plus VAT
6147728	E640-4	4 x open	400	E732, E732-2	17 - 35 t	950	17 650 €
6147894	E641-4	4 x semi-closed	400	E732, E732-2	17 - 35 t	1075	18 650 €
6159978	E642-4	4 x completely closed	400	E732, E732-2	17 - 35 t	1125	20 550 €
6147895	E650-4	4 x open	500	E732, E732-2	17 - 35 t	1000	17 900 €
5403085	E651-4	4 x semi-closed	500	E732, E732-2	17 - 35 t	1125	18 800 €
6121831	E651-4-700-HS	4 shells: 700 mm (wid) Tine tips of HARDOX	500	E732, E732-2	17 - 35 t	1275	19 300 €
6147896	E750-4	4 x open	600	E732, E732-2	17 - 35 t	1070	18 150 €
6103759	E751-4	4 x semi-closed	600	E732, E732-2	17 - 35 t	1185	19 300 €
6166304	E752-4	4 x completely closed	600	E732, E732-2	17 - 35 t	1330	23 300 €
6147922	E760-4	4 x open	700	E732, E732-2	17 - 35 t	1130	19 100 €
6147923	E761-4	4 x semi-closed	700	E732, E732-2	17 - 35 t	1150	19 850 €
6149607	E770-4	4 x open	800	E732, E732-2	17 - 35 t	1160	19 550 €
6149609	E771-4	4 x semi-closed	800	E732, E732-2	17 - 35 t	1230	20 450 €
6161936	E772-4	4 x completely closed	800	E732, E732-2	17 - 35 t	1380	24 000 €
6147934	E780-4	4 x open	900	E732, E732-2	20 - 35 t	1195	19 800 €
6147935	E781-4	4 x semi-closed	900	E732, E732-2	20 - 35 t	1310	20 800 €
6105402	E790-4	4 x open	1000	E732, E732-2	20 - 35 t	1150	20 150 €
6120825	E791-4	4 x semi-closed	1000	E732, E732-2	20 - 35 t	1235	21 200 €

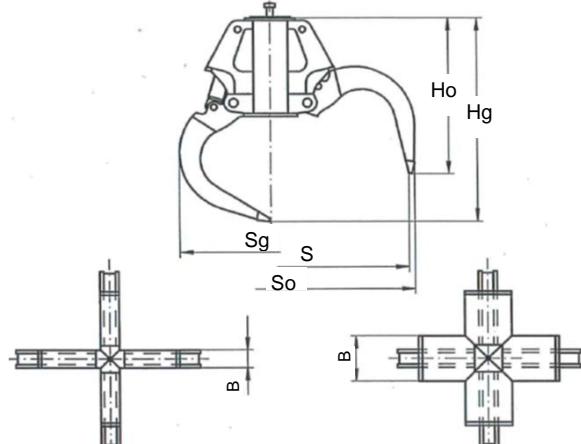

Type designation	Hg	Ho	Sg	So	S	B
E640-4	1620	1293	1345	2130	1346	175
E641-4	1620	1293	1345	2130	1935	450
E642-4	1620	1293	1345	2130	1935	985
E650-4	1700	1325	1400	2280	2080	175
E651-4	1700	1325	1400	2280	2080	450
E651-4-700-HS	1700	1325	1400	2280	2080	700
E750-4	1750	1345	1450	2385	2175	175
E751-4	1750	1345	1450	2380	2175	450
E752-4	1750	1345	1450	2380	2175	1080
E760-4	1780	1352	1480	2420	2230	175
E761-4	1780	1352	1480	2420	2230	450
E770-4	1850	1395	1550	2520	2340	175
E771-4	1850	1395	1550	2520	2340	450
E772-4	1850	1395	1550	2520	2340	1245
E780-4	1910	1435	1620	2640	2440	175
E781-4	1910	1435	1620	2640	2440	450
E790-4	1950	1416	1640	2740	2550	175
E791-4	1950	1416	1640	2740	2550	450

Altitude of rotation gear E732 incl. T72 = 800 mm

Pressure: max. 300 bar




E732 + E751-4



Multi-jaw grab with 5 grab cylinders and rotary feed system
Grab rotation gear is required

Material no.	Type designation	Grab shells Number and shape	Litres	Suitable for, grab rotation gear	Recommended excavator size	Weight (kg)	List price plus VAT
6147727	E640	5 x open	400	E732, E732-2	17 - 35 t	1150	21 200 €
6146940	E641	5 x semi-closed	400	E732, E732-2	17 - 35 t	1265	22 500 €
6147729	E642	5 x completely closed	400	E732, E732-2	17 - 35 t	1280	24 350 €
4538154	E650	5 x open	500	E732, E732-2	17 - 35 t	1200	21 450 €
4532318	E651	5 x semi-closed	500	E732, E732-2	17 - 35 t	1350	22 650 €
6101236	E652	5 x completely closed	500	E732, E732-2	17 - 35 t	1360	24 650 €
4533853	E750	5 x open	600	E732, E732-2	17 - 35 t	1270	21 800 €
4533842	E751	5 x semi-closed	600	E732, E732-2	17 - 35 t	1360	23 100 €
3550976	E752	5 x completely closed	600	E732, E732-2	17 - 35 t	1400	25 200 €
6147897	E760	5 x open	700	E732, E732-2	17 - 35 t	1240	22 350 €
3572369	E761	5 x semi-closed	700	E732, E732-2	17 - 35 t	1380	23 600 €
6147928	E762	5 x completely closed	700	E732, E732-2	17 - 35 t	1520	25 400 €
6149608	E770	5 x open	800	E732, E732-2	17 - 35 t	1280	22 800 €
6149610	E771	5 x semi-closed	800	E732, E732-2	17 - 35 t	1430	24 000 €
6149631	E772	5 x completely closed	800	E732, E732-2	17 - 35 t	1560	25 950 €
6147898	E780	5 x open	900	E732, E732-2	20 - 35 t	1320	23 250 €
6147899	E781	5 x semi-closed	900	E732, E732-2	20 - 35 t	1480	24 450 €
6147931	E782	5 x completely closed	900	E732, E732-2	20 - 35 t	1600	26 550 €
6147900	E790	5 x open	1000	E732, E732-2	20 - 35 t	1350	23 700 €
4558307	E791	5 x semi-closed	1000	E732, E732-2	20 - 35 t	1400	24 950 €
6147929	E792	5 x completely closed	1000	E732, E732-2	20 - 35 t	1760	26 800 €

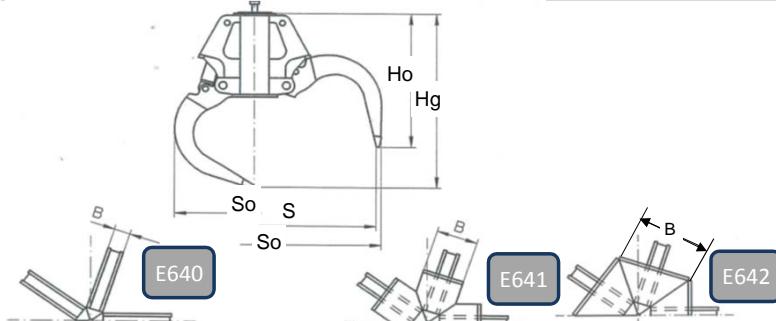

Type designation	Hg	Ho	Sg	So	S	B
E640	1620	1293	1345	2130	1935	175
E641	1620	1293	1345	2130	1935	450
E642	1620	1293	1345	2130	1935	760
E650	1700	1325	1400	2280	2080	175
E651	1700	1325	1400	2280	2080	450
E652	1700	1325	1400	2280	2080	780
E750	1750	1345	1450	2385	2175	175
E751	1750	1345	1450	2385	2175	450
E752	1750	1345	1450	2385	2175	800
E760	1780	1352	1480	2420	2230	175
E761	1780	1352	1480	2420	2230	450
E762	1780	1352	1480	2420	2230	820
E770	1850	1395	1550	2520	2340	175
E771	1850	1395	1550	2520	2340	450
E772	1850	1395	1550	2520	2340	835
E780	1910	1435	1620	2640	2440	175
E781	1910	1435	1620	2640	2440	450
E782	1910	1435	1620	2640	2440	850
E790	1950	1416	1640	2740	2550	175
E791	1950	1416	1640	2740	2550	450
E792	1950	1416	1640	2740	2550	880


Altitude of rotation gear E732 incl. T72 = 800 mm

Pressure: max. 300 bar



**Multi-jaw grab with 4 / 5 grab cylinders and rotary feed system
Grab rotation gear is required**

Material no.	Type designation	Grab shells Number and shape	Litres	Suitable for, grab rotation gear	Recommended excavator size	Weight (kg)	List price plus VAT
4543822	E850-4	4 x open	700	E832-2	25 - 50 t	1100	22 600 €
4537380	E850	5 x open	700	E832-2	25 - 50 t	1360	23 850 €
6077566	E851-4	4 x semi-closed	700	E832-2	25 - 50 t	1260	22 750 €
4537448	E851	5 x semi-closed	700	E832-2	25 - 50 t	1540	24 950 €
6059333	E852	5 x completely closed	700	E832-2	25 - 50 t	1650	27 100 €
6147924	E860-4	4 x open	900	E832-2	25 - 50 t	1150	22 950 €
4538778	E860	5 x open	900	E832-2	25 - 50 t	1420	25 000 €
4564372	E861-4	4 x semi-closed	900	E832-2	25 - 50 t	1340	24 000 €
4534514	E861	5 x semi-closed	900	E832-2	25 - 50 t	1640	26 350 €
6031873	E862	5 x completely closed	900	E832-2	25 - 50 t	1730	28 950 €
6147925	E94.50-4	4 x open	1100	E832-2	25 - 50 t	1280	23 400 €
6023071	E94.50	5 x open	1100	E832-2	25 - 50 t	1445	26 200 €
6077568	E94.51-4	4 x semi-closed	1100	E832-2	25 - 50 t	1400	24 300 €
6022873	E94.51	5 x semi-closed	1100	E832-2	25 - 50 t	1678	27 500 €
6031869	E94.52	5 x completely closed	1100	E832-2	25 - 50 t	1821	29 500 €
6147926	E94.70-4	4 x open	1400	E832-2	25 - 50 t	1650	24 900 €
6147921	E94.70	5 x open	1400	E832-2	25 - 50 t	1730	27 000 €
6147927	E94.71-4	4 x semi-closed	1400	E832-2	25 - 50 t	1700	26 000 €
6043015	E94.71	5 x semi-closed	1400	E832-2	25 - 50 t	1730	28 500 €
6147930	E94.72	5 x completely closed	1400	E832-2	25 - 50 t	2100	30 750 €

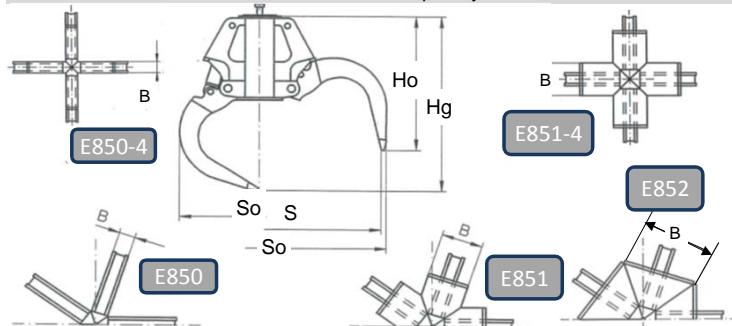

Type designation	Hg	Ho	Sg	So	S	B
E850-4	1820	1430	1520	2460	2260	175
E850	1820	1430	1520	2460	2260	175
E851-4	1820	1430	1520	2460	2500	450
E851	1820	1430	1520	2460	2260	450
E852	1820	1430	1520	2460	2260	840
E860-4	1950	1475	1650	2700	2500	175
E860	1950	1475	1650	2700	2500	175
E861-4	1950	1475	1650	2700	2690	450
E861	1950	1475	1650	2700	2500	450
E862	1950	1475	1650	2700	2500	900
E94.50-4	2050	1515	1734	2890	2260	175
E94.50	2050	1515	1734	2890	2690	175
E94.51-4	2050	1515	1734	2890	2690	450
E94.51	2050	1515	1734	2890	2690	450
E94.52	2050	1515	1734	2890	2690	960
E94.70-4	2150	1551	1872	3102	2872	175
E94.70	2150	1551	1872	3102	2872	175
E94.71-4	2150	1551	1872	3102	2872	450
E94.71	2150	1551	1872	3102	2872	450
E94.72	2150	1551	1872	3102	2872	1050

Altitude of rotation gear E832-2 incl. T82 = 940 mm

Pressure: max. 300 bar



ATLAS GmbH - Atlas Str. 6 - 27777 Ganderkesee

Tel.: +49 (0) 4222 954-0 - Fax : +49 (0) 4222 954343

Offer list: Attachments for hydraulic excavators

Valid from: 01.06.2018

Connecting part for hydraulic hammer


Material no.	Type designation	Suitable for SWE (quick change devices)	Hammer types	Weight (kg)	List price plus VAT
4584309	T11.50	T11.20 without screws	HM110, HM135-HM350V	40	1 070 €
3548143	T650	T620V , T620H with screws and nuts 16 x M20x85	KRUPP HM110-HM600 MB700, MB750 MONTABERT BRH250-900, 500, 700, 1000, 501L 640x485x25 base plate	125	1 250 €
5411734	T650 without openings	T620V , T620H	for all purposes without openings 640x485x25 base plate	125	1 250 €
6159805	T650-HM1000	T620V , T620H with screws and nuts 12x M30x100	HM1000, HM1200 640x510x30 base plate	145	1 900 €
4558443	T63.50	T63.20, T63.20H without screws	KRUPP HM350,500,550,560,580,600, KRUPP HM700,711,712,720,800,951,952,960,1000 MONTABERT BRH501,620,625,750,900	200	2 450 €
4543708	T750/2	T722, T722 H without screws	KRUPP HM350,500,550,560,580,600, KRUPP HM700,711,712,720,800,951,952,960,1000 MONTABERT BRH501,620,625,750,900 690x650x30 base plate	214	2 980 €

Connecting plate for welding on the rear side of the dipper

Material no.	Type designation	suitable for SWE (quick change devices)	Weight (kg)	List price plus VAT
4504256	T11.55	T11.20	40	1 300 €
4542252	T652	T620V u T620H	66	1 170 €
3548121	T655	T620V u T620H	81	1 350 €
6014424	T63.55	T63.20, T63.20H	215	2 700 €
4543731	T755/2	T722, T722 H	230	3 400 €

Adapters for rock buckets and trench diggers

Material no.	Type designation	Suitable for	a dipper for permanent installation	Weight (kg)	List price plus VAT
			Bolts, Ø	Arm width in mm	
3550249	T658	T620V	60	268	130 1 720 €
6027091	T63.58	T63.20, T63.20H	80	300	250 3 600 €

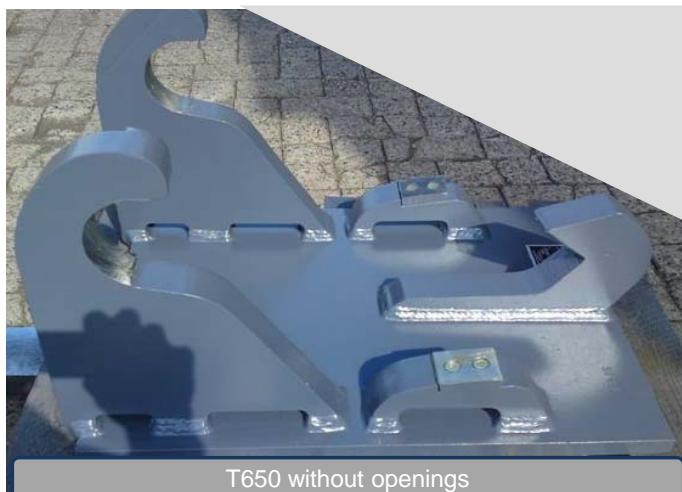

Product line of dippers and buckets

The product line of dippers and buckets of ATLAS offers different forms of buckets, capacities and widths for any kind of application, optimally adapted to the relevant carrier:

- Bucket
- Rock bucket
- Trench lining bucket
- Dipper for loamy soil
- Heavy duty fork
- Drainage bucket
- Trench digger
- Multi-purpose dipper


In accordance with the relevant dimensions of the articulated jib ends, the product line of buckets and dippers is divided as follows:

- Dipper attachments for articulated jib end 168 mm (closed) / Ø 50 mm
- Dipper attachments for articulated jib end 268 mm (closed) / Ø 60 mm
- Dipper attachments for articulated jib end 300 mm (closed) / Ø 80 mm
- Dipper attachments for articulated jib end 311 mm (closed) / Ø 80 mm

ATLAS buckets and dippers meet the requirements of the civil engineering:

- The grade of the steel and the special design guarantee stability and wear resistance.
- All parts particularly subject to wear as floor and side blades as well as the floor panel are made of high-strength surface-coated fine-grain structural steel.
- Easy penetration is provided by the free punch due to the slightly conical shape of the dipper. Teeth holders feature flat design and are incorporated in the blade. Flat design provides less digging resistance and high efficiency, for example when unloading, i.e. more work cycles.

For the different types of soil we provide teeth of different shapes:

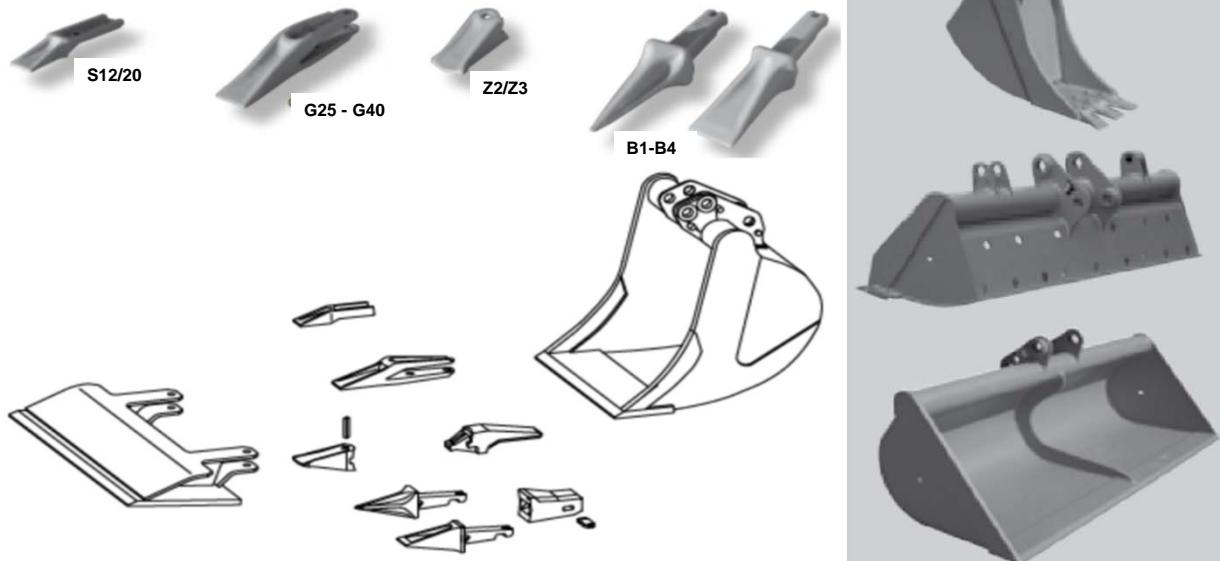

Attachments for dippers


The buckets and dippers are suitable for all kinds of typical application, incl. when high tearing forces are required as for rock breaking off and other demolition works. Teeth are internally welded on and with replaceable tine tips.

Bucket for ATLAS 1004, teeth are internally welded on and with replaceable ATLAS Z2 tine tips

Material no.	Type designation	Width	Number of teeth	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
4569311	F03.12	500	3	230	168/50	6 - 11 t	185	1 980 €
4569322	F03.12SW	500	3	230	T11.20	6 - 11 t	200	2 450 €
4569333	F03.13	600	4	300	168/50	6 - 11 t	210	2 100 €
4569344	F03.13SW	600	4	300	T11.20	6 - 11 t	230	2 570 €
4575400	F03.15	850	5	460	168/50	6 - 11 t	260	2 490 €
4569366	F03.15SW	850	5	460	T11.20	6 - 11 t	280	2 930 €

Bucket for ATLAS 1104 and 1204, teeth are internally welded on and with replaceable ATLAS Z2 tine tips

Material no.	Type designation	Width	Number of teeth	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
4569377	F13.12	500	3	230	268/60	9 - 13 t	210	2 040 €
4569388	F13.12SW	500	3	230	T620V/T620H	9 - 13 t	250	2 600 €
4569399	F13.13	600	4	300	268/60	9 - 13 t	245	2 270 €
4569402	F13.13 SW	600	4	300	T620V/T620H	9 - 13 t	270	2 800 €
4569413	F13.14	700	4	360	268/60	9 - 13 t	265	2 400 €
4569424	F13.14SW	700	4	360	T620V/T620H	9 - 13 t	300	2 950 €
4577457	F13.15	850	5	460	268/60	9 - 13 t	300	2 680 €
4574523	F13.15 SW	850	5	460	T620V/T620H	9 - 13 t	330	3 200 €
4569435	F13.16	1000	5	560	268/60	9 - 13 t	330	2 760 €
4569446	F13.16 SW	1000	5	560	T620V/T620H	9 - 13 t	365	3 300 €
3130934	LHANBSATZ 5TO.TL	Load hook 5 t for retrofitting					7	400 €

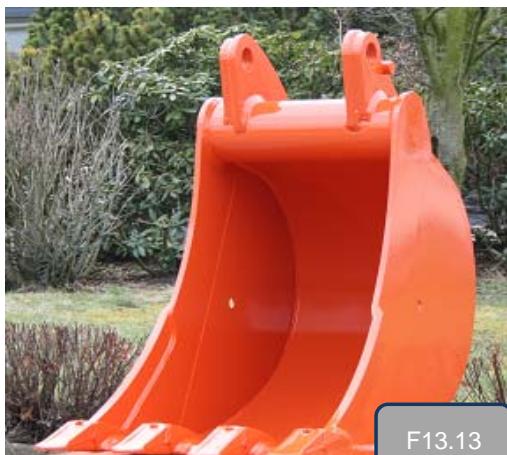

F13.13

No additional costs for special colors!


 F13.16SW-1150mm
6149218

Special widths with additional costs!

Bucket: standard design with ATLAS B1 tooth system or a non-serrated blade

Material no.	Type designation GL.S. = non-serrated blade	Width	Number of teeth	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
3174049	F412	500	3	330	268/60	12 - 17 t	320	2 920 €
6150189	F412 GL.S.	500		330	268/60	12 - 17 t	300	2 650 €
3179204	F412 SW	500	3	330	T620V/T620H	12 - 17 t	320	3 430 €
6017022	F412 SW GL.S.	500		330	T620V/T620H	12 - 17 t	300	3 160 €
4107813	AZS F412	540			Scraper blade above the tine tips		35	880 €
3174061	F413	600	3	420	268/60	12 - 17 t	340	3 020 €
3515177	F413 GL.S.	600		420	268/60	12 - 17 t	320	2 750 €
3179259	F413 SW	600	3	420	T620V/T620H	12 - 17 t	370	3 480 €
6149821	F413 SW GL.S.	600		420	T620V/T620H	12 - 17 t	350	3 240 €
3532214	AZS F413	640			Scraper blade above the tine tips		50	950 €
3171422	F415	850	4	670	268/60	12 - 17 t	430	3 570 €
3519013	F415 GL.S.	850		670	268/60	12 - 17 t	390	3 230 €
3175175	F415 SW	850	4	670	T620V/T620H	12 - 17 t	450	3 990 €
3552876	F415SW GL.S.	850		670	T620V/T620H	12 - 17 t	415	3 650 €
3532236	AZS F415	890			Scraper blade above the tine tips		63	1 100 €
3174129	F416	1000	5	820	268/60	12 - 17 t	480	3 920 €
3518589	F416 GL.S.	1000		820	268/60	12 - 17 t	450	3 500 €
3186236	F416 SW	1000	5	820	T620V/T620H	12 - 17 t	500	4 270 €
3513277	F416 SW GL.S.	1000		820	T620V/T620H	12 - 17 t	470	3 850 €
4100576	AZS F416	1040			Scraper blade above the tine tips		70	1 200 €
3174141	F417	1100	5	920	268/60	12 - 17 t	510	4 090 €
3081752	F417 GL.S.	1100		920	268/60	12 - 17 t	450	3 670 €
3186156	F417 SW	1100	5	920	T620V/T620H	12 - 17 t	550	4 560 €
3561800	F417 SW GL.S.	1100		920	T620V/T620H	12 - 17 t	500	4 150 €
4100996	AZS F417	1140			Scraper blade above the tine tips		80	1 280 €
6124924	F417SW-SR	1100	5	920	T620V/T620H	12 - 17 t	610	8 800 €
3174163	F418	1300	6	1120	268/60	12 - 17 t	550	4 560 €
3512425	F418 GL.S.	1300		1120	268/60	12 - 17 t	530	4 050 €
3186178	F418 SW	1300	6	1120	T620V/T620H	12 - 17 t	600	4 960 €
3503957	F418 SW GL.S.	1300		1120	T620V/T620H	12 - 17 t	550	4 450 €
4107835	AZS F418	1340			Scraper blade above the tine tips		90	1 360 €
3130934	LHANSATZ 5TO.TLS				Load hook 5 t for retrofitting		7	400 €

Additional prices for the above listed buckets en dippers - from other manufacturers suitable for quick change connectors - see page 34



Quick change connectors from other manufacturers
Additional price for Backhoe and rock bucket -suitable for T620V / T620H

Deliverable for manufacturer	Type designation	for bucket size	List price plus VAT
Lehnhoff	MS10	F412SW - F648SW	695 €
Lehnhoff	MS21/25	F412SW - F648SW	920 €
Verachtert	CW20-40	F415SW - F648SW	610 €
SMP	SMP 2 STD	F413SW - F648SW	1 150 €
SMP	SMP 2 Euro	F413SW - F648SW	1 180 €
Liebherr	SW33	F412SW - F648SW	1 560 €
Liebherr	SW33 LIKU	F412SW - F648SW	2 420 €
Liebherr	SW48	F414SW - F648SW	1 670 €
Liebherr	SW48 LIKU	F414SW - F648SW	2 500 €
Oil Quick	OQ65	F414SW - F648SW	920 €
Oil Quick	OQ70	F414SW - F648SW	1 140 €
Oil Quick	OQ70/55	F415SW - F648SW	1 220 €


F415MS10

F416CW20-40

F416SW48 LIKUFIX

F415OQ65

Rock bucket - HD-design with wear plates and ATLAS B2 tooth system

Material no.	Type designation	Width	Number of teeth	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
3174083	F643	600	3	420	268/60	15 - 20 t	400	4 250 €
3186190	F643SW	600	3	420	T620V/T620H	15 - 20 t	440	4 600 €
3172003	F645	850	4	670	268/60	15 - 20 t	500	4 720 €
3186214	F645SW	850	4	670	T620V/T620H	15 - 20 t	540	5 500 €
3174185	F647	1100	5	920	268/60	15 - 20 t	620	5 300 €
3186134	F647 SW	1100	5	920	T620V/T620H	15 - 20 t	660	5 700 €
3174209	F648	1300	5	1120	268/60	15 - 20 t	660	5 800 €
3186112	F648SW	1300	5	1120	T620V/T620H	15 - 20 t	700	6 150 €

Additional prices for the above listed buckets en dippers - from other manufacturers suitable for quick change connectors - see page 34

4569457	F63.23	600	3	430	300/80	17 - 25 t	480	4 550 €
4569468	F63.23SW	600	3	430	T63.20/T63.20H	17 - 25 t	530	5 450 €
4569479	F63.24	700	4	530	300/80	17 - 25 t	535	4 790 €
4569480	F63.24 SW	700	4	530	T63.20/T63.20H	17 - 25 t	590	5 550 €
4569491	F63.25	850	4	670	300/80	17 - 25 t	590	4 950 €
4569004	F63.25 SW	850	4	670	T63.20/T63.20H	17 - 25 t	645	5 800 €
4569060	F63.15	850	4	750	300/80	17 - 25 t	640	5 050 €
4569071	F63.15 SW	850	4	750	T63.20/T63.20H	17 - 25 t	670	5 900 €
4569015	F63.26	1000	4	830	300/80	17 - 25 t	635	5 400 €
4569026	F63.26 SW	1000	4	830	T63.20/T63.20H	17 - 25 t	690	6 150 €
4574421	F63.27	1100	5	930	300/80	17 - 25 t	680	5 800 €
4569037	F63.27 SW	1100	5	930	T63.20/T63.20H	17 - 25 t	740	6 650 €
4574432	F63.28	1300	5	1140	300/80	17 - 25 t	780	6 250 €
4569048	F63.28 SW	1300	5	1140	T63.20/T63.20H	17 - 25 t	815	7 000 €
4573522	F63.29	1500	6	1340	300/80	17 - 25 t	840	6 550 €
4569059	F63.29 SW	1500	6	1340	T63.20/T63.20H	17 - 25 t	895	7 450 €
3130934	LHANBSATZ 5TO.TL.S				Load hook 5 t for retrofitting		7	400 €



Rock bucket - HD-design with wear plates and tooth system

Material no.	Type designation	Width	Number of teeth	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
3177768	F748	1300	5	1260	forked/80	22 - 28 t	930	upon request
3564143	F748 SW	1300	5	1260	T722/T722H	22 - 28 t	980	upon request
3177848	F718	1500	5	1500	forked/80	22 - 28 t	1005	upon request
3564110	F718 SW	1500	5	1500	T722/T722H	22 - 28 t	1070	upon request
3130934	LHANBSATZ 5TO.TL.S	Load hook 5 t for retrofitting					7	400 €

Rock bucket - HD-design with wear plates and tooth system and load hook 12,5 t. outside SW (quick coupler) dipper

Material no.	Type designation	Width	Number of teeth	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
3183415	F847	1000	3	910	forked/80	28 - 35 t	800	upon request
3564325	F847 SW	1000	3	910	T722/T722H	28 - 35 t	850	upon request
3183528	F849	1500	5	1500	forked/80	28 - 35 t	1140	upon request
3564267	F849 SW	1500	5	1500	T722/T722H	28 - 35 t	1200	upon request

Rock bucket - HD-design with wear plates suitable for 210 - 260LC with CAT tooth system

Material no.	Type designation	Width	Number of teeth	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
6149301	F75.15	850	4x 1U3352	680	311/80	22 - 28 t	750	upon request
6083115	F75.15MS21	850	4x 1U3352	680	Lehnhoff MS21	22 - 28 t	680	upon request
6149303	F75.17	1100	5x 1U3352	940	311/80	22 - 28 t	800	upon request
6083119	F75.17MS21	1100	5x 1U3352	940	Lehnhoff MS21	22 - 28 t	730	upon request
6149305	F75.18	1300	5x 1U3352	1160	311/80	22 - 28 t	850	upon request
6083132	F75.18MS21	1300	5x 1U3352	1160	Lehnhoff MS21	22 - 28 t	780	upon request
6149306	F75.09	1500	6x 1U3352	1370	311/80	22 - 28 t	1040	upon request
6091486	F75.09MS21	1500	6x 1U3352	1370	Lehnhoff MS21	22 - 28 t	970	upon request
6101086	F75.29	1600	6x 1U4452	1650	311/80	22 - 28 t	1420	upon request
6123181	F75.29MS21	1600	6x 1U4452	1650	Lehnhoff MS21	22 - 28 t	1350	upon request
3130934	LHANBSATZ 5TO.TL.S	Load hook 5 t for retrofitting					7	400 €



F748



F75.17MS21

Drainage bucket

Suitable for application in sticky material.

Scope of delivery: Screw teeth, hydr. ejectors, 2 hoses

Material no.	Type designation	Width	Number of teeth	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
3077814	F17.2	300	2 G25	130	168/50	6 - 11 t	220	4 300 €
3507893	F17.2SW	300	2 G25	130	T11.20	6 - 11 t	240	4 800 €
3507837	F17.3	400	3 G25	190	168/50	6 - 11 t	240	4 500 €
3507928	F17.3SW	400	3 G25	190	T11.20	6 - 11 t	260	4 920 €
3080148	F402	300	2 G30	200	268/60	12 - 20 t	310	4 940 €
3080171	F402SW	300	2 G30	200	T620V/T620H	12 - 20 t	375	5 230 €
6173322	F402MS10	300	2 G30	200	Lehnhoff MS10	12 - 20 t	375	5 950 €
3080160	F403	400	3 G30	285	268/60	12 - 20 t	345	5 090 €
3080182	F403SW	400	3 G30	285	T620V/T620H	12 - 20 t	410	5 430 €
6068774	F403MS10	400	3 G30	285	Lehnhoff MS10	12 - 20 t	410	6 350 €

Trench lining bucket: flat shape, with a non-serrated blade.

Material no.	Type designation	Width	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
3171875	F435	850	490	268/60	10 - 20 t	290	2 650 €
3183631	F435SW	850	490	T620V/T620H	10 - 20 t	315	3 400 €
respectively with openings in the floor blade for 4 teeth 3604459							
4569082	F63.35	850	530	300/80	17 - 25 t	420	3 900 €
4569093	F63.35SW	850	530	T63.20/T63.20H	17 - 25 t	510	4 610 €

All-purpose bucket, round shape, for light soils, with a non-serrated blade

3159551	F438	1300	1100	268/60	12 - 20 t	440	3 680 €
3186054	F438SW	1300	1100	T620V/T620H	12 - 20 t	480	4 250 €

respectively with openings in the floor blade for 5 teeth 3604459

Dipper for loamy soil, slender design, without ejector

Material no.	Type designation	Width	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
3569488	F01.4	400	200	168/50	6 - 11 t	140	2 100 €
3589813	F01.4SW	400	200	T11.20	6 - 11 t	172	2 400 €
respectively with openings in the floor blade for 3 teeth 3646766							
3171717	F454	400	260	268/60	10 - 20 t	220	2 610 €
3186098	F454SW	400	260	T620V/T620H	10 - 20 t	265	3 050 €
respectively with openings in the floor blade for 2 teeth 3604459							
3171739	F455	500	350	268/60	10 - 20 t	245	2 960 €
3186076	F455SW	500	350	T620V/T620H	10 - 20 t	280	3 400 €
6019753	F456	600	400	268/60	10 - 20 t	270	3 140 €
6019755	F456SW	600	400	T620V/T620H	10 - 20 t	300	3 590 €

respectively with openings in the floor blade for 3 teeth 3604459



**Trench digger with a rear blade and with
screwed floor blade, fixed
with water holes in the rear wall up to G69SW.**

Material no.	Type designation	Width	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
2232242	G11.2	1500	260	168/50	6 - 11 t	225	2 480 €
3110429	G11.2SW	1500	260	T11.20	6 - 11 t	235	2 880 €
1446351	G62	2000	400	268/60	12 - 20 t	345	2 980 €
2213669	G62SW	2000	400	T620V/T620H	12 - 20 t	360	3 380 €
1446373	G64	2000	560	268/60	12 - 20 t	405	3 200 €
2213647	G64SW	2000	560	T620V/T620H	12 - 20 t	415	3 650 €
6177733	G64SW o.WL.	2000	560	T620V/T620H	12 - 20 t	418	3 650 €
6132650	G64MS10	2000	560	Lehnhoff MS10	12 - 20 t	505	4 600 €
1446384	G69	2200	700	268/60	12 - 20 t	480	3 790 €
2213636	G69SW	2200	700	T620V/T620H	12 - 20 t	490	4 220 €
3084562	G624	2000	800	268/60	12 - 20 t	600	4 000 €
3551148	G624SW	2000	800	T620V/T620H	12 - 20 t	610	4 350 €
	G624 equipped as a tool carrier, no rear blade, with a holder for pallet forks						
4569128	G63.34	2000	710	300/80	17 - 25 t	590	5 050 €
4569139	G63.34SW	2000	710	T63.20/T63.20H	17 - 25 t	670	5 700 €
4569140	G63.36	2000	900	300/80	17 - 25 t	615	5 400 €
4569151	G63.36SW	2000	900	T63.20/T63.20H	17 - 25 t	695	6 000 €


G11.2

G644MS1

G64SW

G69SW



Extra work attachments upon customer request, for example: 6143861 G64SW 3000mm Sonder

**Trench digger with a rear blade and
screwed floor blade, swivelling: 2 x 45 degrees,
incl. 2 hydraulic swivelling cylinders with hoses up to the articulated jib
with water holes in the rear wall up to G649MS21**

Material no.	Type designation	Width	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
3560092	G11.42	1500	260	168/50	6 - 11 t	280	5 500 €
3560105	G11.42SW	1500	260	T11.20	6 - 11 t	310	5 500 €
4569220	G13.42	1500	260	268/60	9 - 13 t	525	6 300 €
4569231	G13.42SW	1500	260	T620V/T620H	9 - 13 t	540	6 900 €
4105117	G642	2000	400	268/60	12 - 23 t	550	7 400 €
4105140	G642SW	2000	400	T620V/T620H	12 - 23 t	570	7 650 €
4105162	G644	2000	560	268/60	12 - 23 t	580	6 800 €
4105195	G644SW	2000	560	T620V/T620H	12 - 23 t	670	7 500 €
3565291	G644 O.WL.	2000	560	268/60	12 - 23 t	595	6 800 €
3565304	G644SW O.WL.	2000	560	T620V/T620H	12 - 23 t	670	7 500 €
4551162	G649	2200	700	268/60	12 - 23 t	630	7 300 €
4551184	G649SW	2200	700	T620V/T620H	12 - 23 t	705	8 150 €

Additional prices for the above listed trench diggers - from other manufacturers suitable for quick change connectors - see page 42

6025229	G53.45	2000	650	268/60	12 - 23 t	615	8 600 €
hydraulic cylinder installed for protection, with a complete cylinder cover without water holes in the rear wall							
6030801	G53.45SW	2000	650	T620V/T620H	12 - 23 t	700	9 000 €
hydraulic cylinder installed for protection, with a complete cylinder cover without water holes in the rear wall							
4569184	G63.44	2000	710	300/80	17 - 25 t	955	9 000 €
4569195	G63.44SW	2000	710	T63.20/T63.20H	17 - 25 t	1050	9 900 €
4569208	G63.46	2000	900	300/80	17 - 25 t	995	9 300 €
4569219	G63.46SW	2000	900	T63.20/T63.20H	17 - 25 t	1100	10 200 €
6149280	G75.53	2000	860	311/80	22 - 28 t	980	upon request
6117682	G75.53MS21	2000	860	Lehnhoff MS21	22 - 28 t	980	upon request
4902258	G742	2200	910	forked/80	22 - 35 t	1005	upon request
5412837	G742SW	2200	910	T722/T722H	22 - 35 t	1100	upon request

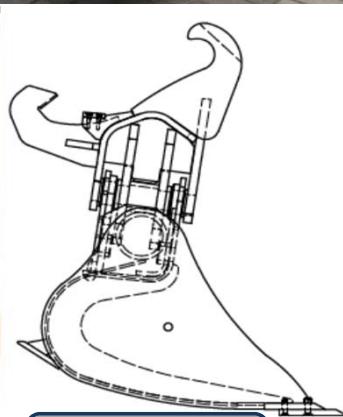

Trench digger with round rear upon request

Trench digger, bucket shape with rear blade and fixed to the ground or swivelling 2 x 45 degrees with 2 hydraulic swivelling cylinders with hoses up to the articulated jib with water holes in the rear wall

Material no.	Type designation	Version	Width	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
6182706	G54	fixed	2000	580	268/60	12 - 23 t	450	4 000 €
6179565	G54SW	fixed	2000	580	T620V/T620H	12 - 23 t	450	4 450 €
6182707	G55	fixed	2000	780	268/60	12 - 23 t	490	4 700 €
6167787	G55SW	fixed	2000	780	T620V/T620H	12 - 23 t	490	5 100 €
6156986	G654	2x45deg.	2000	580	268/60	12 - 23 t	600	7 500 €
6156981	G654SW	2x45deg.	2000	580	T620V/T620H	12 - 23 t	640	8 200 €
6156825	G655	2x45deg.	2000	780	268/60	12 - 23 t	650	8 200 €
6156789	G655SW	2x45deg.	2000	780	T620V/T620H	12 - 23 t	670	8 900 €




Trench digger, bucket shape with rear blade and fixed or swivelling 2 x 50 degrees with rotator HKS Xtra Tilt 250, with hoses up to the articulated jib with water holes in the rear wall

Material no.	Type designation	Width	Litres	Recommended excavator size	Weight (kg)	List price plus VAT
6182708	G654 Body with rotator	2000	580	12 - 23 t	750	12 500 €
6173386	G655 Body with rotator	2000	780	12 - 23 t	800	12 900 €

Other bodyshapes upon request!!

Screw adaptor suitable for trench digger

6173387	SA-G-T620	Screw plate for T620V/T620H	125	3 080 €
6173388	SA-G-MS10	Screw plate for Lehnhoff MS10	135	3 080 €
6173389	SA-G-CW20-40	Screw plate for Verachtert CW20-40	120	3 080 €
6182709	SA-G-OQ65	Screw plate for OilQuick OQ65	115	6 900 €
6180894	SA-G-OQ70/55	Screw plate for OilQuick OQ70/55	125	7 500 €

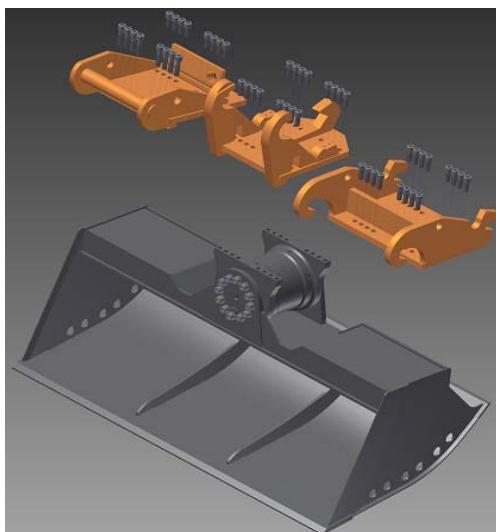

Screw plate for T620V/T620H
Body G655 with rotator

**Multi-purpose bucket, bucket shape without rear blade,
with non-serrated floor blade, fixed
G475 - G 477SW floor panel from 400HB special steel**

Material no.	Type designation	Width	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
3174265	G475	1500	750	268/60	12 - 23 t	370	3 370 €
3186032	G475SW	1500	750	T620V/T620H	12 - 23 t	410	3 960 €
3174298	G476	1750	890	268/60	12 - 23 t	420	3 560 €
3186010	G476SW	1750	890	T620V/T620H	12 - 23 t	460	4 100 €
3174323	G477	2000	1020	268/60	12 - 23 t	450	3 750 €
3185995	G477SW	2000	1020	T620V/T620H	12 - 23 t	500	4 320 €
4568785	G63.76	1750	1230	300/80	17 - 25 t	590	5 500 €
4568796	G63.76SW	1750	1230	T63.20/T63.20H	17 - 25 t	680	6 100 €
4568809	G63.77	2000	1420	300/80	17 - 25 t	655	6 450 €
4568810	G63.77SW	2000	1420	T63.20/T63.20H	17 - 25 t	790	7 100 €
4573884	G83.76	2000	1600	forked/80	22 - 35 t	825	upon request
4550490	G83.76SW	2000	1600	T722/T722H	22 - 35 t	920	upon request

**Multi-purpose bucket, round bucket shape without rear blade, with
non-serrated floor blade, swivelling 2 x 45 degrees,
incl. 2 hydraulic swivelling cylinders with hoses up to the articulated jib
G485 - G 487MS21 floor panel from 400HB special steel**

Material no.	Type designation	Width	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
4573862	G485	1500	750	268/60	12 - 23 t	575	7 100 €
4557033	G485SW	1500	750	T620V/T620H	12 - 23 t	650	7 850 €
4573840	G486	1750	890	268/60	12 - 23 t	610	7 550 €
4557055	G486SW	1750	890	T620V/T620H	12 - 23 t	675	8 100 €
4573828	G487	2000	1020	268/60	12 - 23 t	660	7 850 €
4557077	G487SW	2000	1020	T620V/T620H	12 - 23 t	735	8 400 €
4568821	G63.86	1750	1230	300/80	17 - 25 t	960	9 500 €
4568832	G63.86SW	1750	1230	T63.20/T63.20H	17 - 25 t	1055	10 100 €
4568843	G63.87	2000	1420	300/80	17 - 25 t	1010	upon request
4568854	G63.87SW	2000	1420	T63.20/T63.20H	17 - 25 t	1115	upon request
4573873	G83.86	2000	1500	forked/80	22 - 35 t	1180	upon request
5400015	G83.86SW	2000	1500	T722/T722H	22 - 35 t	1230	upon request



Quick change connectors from other manufacturers suitable for trench digger

Additional price for swivelling trench digger of G13.42SW, G485SW-G487SW, G642-G655SW

Deliverable for manufacturer	Type designation	for bucket size	List price plus VAT
Lehnhoff	MS10	G13.42SW - G655SW	435 €
Lehnhoff	MS21/25	G13.42SW - G655SW	770 €
Verachtert	CW20-40	G13.42SW - G655SW	485 €
SMP	SMP 2 STD	G13.42SW - G655SW	810 €
SMP	SMP 2 Euro	G13.42SW - G655SW	910 €
Liebherr	SW33	G13.42SW - G655SW	1 400 €
Liebherr	SW33 LIKU	G13.42SW - G655SW	6 050 €
Liebherr	SW48	G13.42SW - G655SW	1 500 €
Liebherr	SW48 LIKU	G13.42SW - G655SW	6 750 €
Oil Quick	OQ65	G13.42SW - G655SW	3 550 €
Oil Quick	OQ70	G13.42SW - G655SW	3 880 €
Oil Quick	OQ70/55	G13.42SW - G655SW	4 010 €



SWINGOTILT

The SWINGOTILT with 2 telescopic cylinders can be swivelled 2x40 ° and rotated 360 ° endlessly

Material no.	Type designation			Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
6197760	ST15-T620 o.Mg.V.			T620V/T620H	10 - 15 t	400	24 400 €
6196620	ST18-T620 o.Mg.V.			T620V/T620H	14 - 18 t	500	25 800 €
6129250	ST22-T620 o.Mg.V.			T620V/T620H	16 - 22 t	620	27 150 €
6145950	ST15-22 HP	Hydraulic package		T620V/T620H		11	390 €
	Hydraulic mounting kits on the machine are required:						
	Two-way						
6181511	Hydraulic mounting kit Comfort:Tool control for 16 different working tools via potentiometer adjustable from the cab (e.g. flail mower, mowing bucket, branch cutter, vibration bear, hydraulic hammer). Consisting of pressure compensation valve with electronic control for oil quantity and pressure.						
3082106	Hydraulic attachment kit, for K-sorting grab, piping up to the tip of the shaft						
	Mobile						
6191510	Hydraulic mounting kit Comfort:hammer, shears, sorting grab plus additional circuit for 2 articulated arm or SWINGOTILT.Operation via rocker in left joystick.Joystick steering is not possible with this option. Dozer blade operation Standard.						




ST15-620 o.Mg.V.
Photo: Volvo holder



ST18-620 o.Mg.V.
Photo: Volvo holder



ST22-620 o.Mg.V.

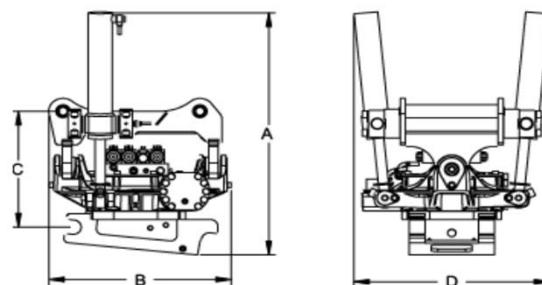

Dimensions approx.	A	B	C	D
ST15-620	1002	807	560	789
ST18-620	980	850	525	830
ST22-620	1060	910	620	850

Ripper tooth

Material no.	Type designation	Depth	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
6017199	H43.20	268/60	12 - 20 t	201	upon request	
6016095	H43.20SW	T620V/T620H	12 - 20 t	209	upon request	
4569242	H63.20	300/80	17 - 25 t	290	upon request	
4568752	H63.20SW	T63.20/T63.20H	17 - 25 t	375	upon request	

Heavy duty fork with 6 forked screw teeth, for picking up pave stones

Material no.	Type designation	Width	Litres	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
3509431	J40.8	1200	400	268/60	12 - 23 t	476	5 200 €
3548303	J40.8 SW	1200	400	T620V/T620H	12 - 23 t	515	5 700 €
6162151	J40.8 MS10	1200	400	Lehnhoff MS 10	12 - 23 t	515	6 500 €

Load hook, capable of rotation

Material no.	Type designation	Load-bearing capacity kN	Length	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
1907382	K11.10	75	560	168/50	6 - 11 t	30	920 €
3112272	K11.10SW	75	630	T11.10/T11.20	6 - 11 t	50	1 900 €
1907393	K610	150	690	268/60	12 - 23 t	50	1 200 €
6134786	K610-347	150	690	347/80	17 - 25 t	85	3 100 €
2225061	K610 SW	150	790	T610/T620/T620H	12 - 23 t	75	1 850 €
6150248	K610SW-T713	150	790	T713	17 - 25 t	85	3 330 €
4568423	K63.10	200	820	300/80	17 - 25 t	87	upon request
4568434	K63.10SW	200	960	T63.10 T63.20 T63.20H	17 - 25 t	140	upon request
0729737	K710	125	590	forked/80	22 - 35 t	85	upon request
2224935	K710SW	125	730	T722/T722H	22 - 35 t	180	upon request

Load hook fixed, incapable of rotation

3534909	K613	150	655	268/60	12 - 23 t	50	1 190 €
3572585	K613SW	150	655	T610/T620/T620H	12 - 23 t	60	1 830 €
4580429	K713	200	650	345(closed)/80	22 - 35 t	55	upon request
5411256	K713SW	200	690	T713	22 - 35 t	78	upon request



Pallet forks

Material no.	Type designation	Load-bearing capacity (t.)	Teeth length	Suitable for arm width and bolts, Ø (mm), SWE (quick change device)	Recommended excavator size	Weight (kg)	List price plus VAT
6149549	PG2,5T.ZL1250MM	2,5	1200	268/60	12 - 23 t	210	4 650 €
6147343	PGSW2,5T.ZL1250MM	2,5	1200	T620/T620H	12 - 23 t	330	4 650 €

Original load-lifting magnets MOZELT

as standard with triple chain sling

Material no.	Type designation	Diameter Ø (mm)	KW	Recommended excavator size	Weight (kg)	List price plus VAT
6151212	MLA10	1020	5,5kW220VDC/80%ED		680	upon request
6063217	MLA11	1170	7,0kW220VDC/80%ED		1080	upon request
6073058	MLA12	1270	9,0kW220VDC/80%ED		1400	upon request
6068772	MLA13	1375	10,0kW220VDC/80%ED		1720	upon request
6123773	MLA15	1530	12,5kW220VDC/80%ED		2300	upon request

fixed load hook is necessary, see page 44


 Load-lifting magnets with
a triple chain sling


Michaelis mowing bucket

Material no.	Type designation	Cutting width	Oil level (constant)	Maximum permissible pressure	Recommended excavator size	Weight (kg)	List price plus VAT
M 2200 G		2,20 m	22 l/min	180 bar	ab 10 t	420	upon request
M 2500 G		2,50 m	22 l/min	180 bar	ab 10 t	490	upon request
M 3000 G		3,00 m	22 l/min	180 bar	ab 10 t	610	upon request
M 4000 G		4,00 m	32 l/min	180 bar	ab 10 t	740	upon request
M 5000 G		5,00 m	48 l/min	180 bar	ab 10 t	950	upon request



(*) The weights of the bucket carriers vary depending on the type and construction of the excavator.



- For mowing work on slopes and bottom with simultaneous removal of the mowed material
- High cutting performance via gear drive
- Wear-resistant bearings and components
- Central lubrication
- Proven Michaelis cutting unit with protrusive finger bar and floating blade



The holders (bucket carriers) are available to fit the respective excavator model or the eventually existing quick-change device. Special dimensions are also available. According to the kinematics data of your excavator, we design the optimum opening angle for the mowing bucket.

The bucket carrier is swinging. The pendulous movement is damped by two rubber buffers, which results in a good adaptation to the soil conditions.



Possible accessories
Left:
silt sheets
and
detachable side
panels

Right:
finger skids






Assembly station - rotation gears-



Each rotation gear is checked here before distributing to the dealers

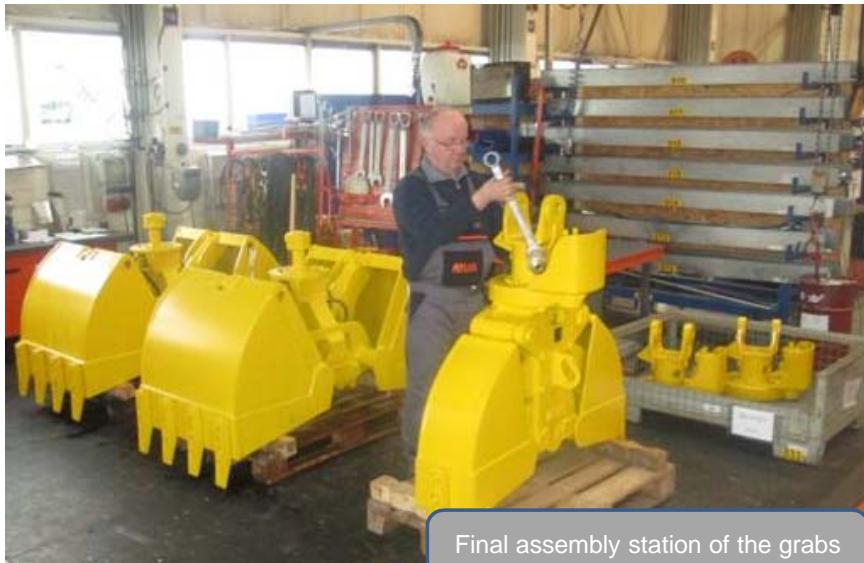

Final assembly station of the grabs
- customized assembly -



Christmas in Vechta



Loading for distributing to the customers

The right tool

We manufacture our tools in standard and special models based on the most current know-how in the fields of machine and steel construction. High-strength steels, tried and tested with century-long experience in this industry are guarantees for cost-efficient and practical work.

Capable service partners. The customer service employees of our dealers are highly trained in the technology in our factory in order to be qualified contacts for you at all times.

SERVICE

ATLAS ATLAS ATLAS

SINCE 1919



EASY. FAST. RELIABLE.

THE RIGHT TOOL

We manufacture our tools in standard and special models based on the most current know-how in the fields of machine and steel construction.

High-strength steels, tried and tested with century-long experience in this industry are guarantees for cost-efficient and practical work.

CAPABLE SERVICE PARTNERS

The customer service employees of our dealers are highly trained in the technology in our factory in order to be qualified contacts for you at all times.

THE BEST SUPPORT

With our AEM system, you also have a reliable partner for servicing. The service menu with maintenance-interval and measurement-data display stores all required information.

A diagnostics interface in the driver's cab for the connection of a laptop enables the easy readout and configuration of the AEM system.

DAS RICHTIGE WERKZEUG

Wir fertigen unsere Werkzeuge in Serien- und Sonderausführungen nach modernsten Erkenntnissen des Maschinen- und Stahlbaus. Hochfeste Stähle, bewährte Technik und jahrzehntelange Erfahrung sind in diesem Sektor Garanten für kostengerechtes und praxisnahes Arbeiten.

KOMPETENTE SERVICEPARTNER

Die Kundendienstmitarbeiter unserer Händler werden intensiv im Bereich Technik in unserem Werk geschult, um für Sie jederzeit ein kompetenter Ansprechpartner zu sein.

BESTE UNTERSTÜTZUNG

Mit unserem AEM-System haben Sie auch bei der Wartung einen verlässlichen Partner. Das Service-menü mit Wartungsintervall- und Messdatenanzeige hält alle erforderlichen Informationen bereit. Eine Diagnose-Schnittstelle in der Fahrerkabine zum Anschluss eines Laptops ermöglicht das leichte Auslesen und Konfigurieren des AEM-Systems.

NOTES / NOTIZEN

ATLAS

SINCE 1919



Werk Ganderkesee

ATLAS GmbH
Atlasstrasse 6
27777 Ganderkesee, Deutschland
T: +49 (0) 4222 954 0
F: +49 (0) 4222 954 220

info@atlasgmbh.com

AVAILABLE & COST EFFECTIVE